


**Advantages:**

- High strength
- Helps standardising your conveyor constructions
- Same hinge width available in many chain types, both steel and plastic, also LBP chains and rubber top chains

Pin material: Austenitic Steel

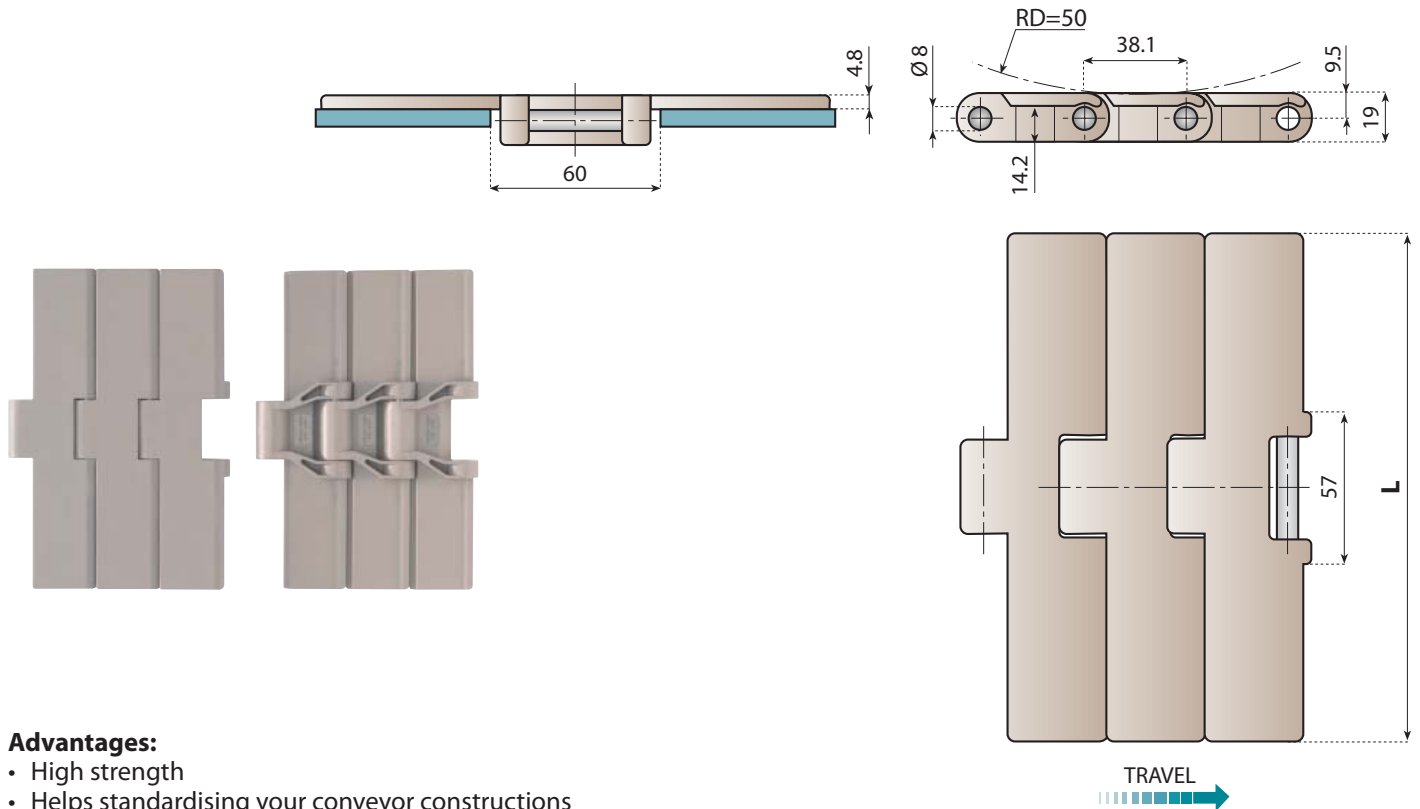

Pages
4⇒7



Pages
296⇒298



Pages
333⇒337

Chain - Ref.	Code	Material plate	Breaking load N	Width L		Weight Kg/m
				mm	inch	
LF 8257 K750	11167	LF Brown	10.000	190.5	7 ½	2.20
LF 8257 K1000	11168			254.0	10	2.55
LF 8257 K1200	11169			304.8	12	2.90
LFG 8257 K750	11175	LFG Dark Grey	10.000	190.5	7 ½	2.20
LFG 8257 K1000	11176			254.0	10	2.55
LFG 8257 K1200	11177			304.8	12	2.90
XPG 8257 K750	11450G	XPG Dark Brown	9.500	190.5	7 ½	2.20
XPG 8257 K1000	11451G			254.0	10	2.55
XPG 8257 K1200	11452G			304.8	12	2.90
NG 8257 K750	11180	NG Green	9.000	190.5	7 ½	2.20
NG 8257 K1000	11181			254.0	10	2.55
NG 8257 K1200	11182			304.8	12	2.90

Standard length: 80 pitches (10 ft. - 3.048 m)

Breaking Load according to Standard ISO 4348 - DIN 8153