


Threaded tube ends for square tubes



TECHNICAL INFORMATION

- **Material:**
Polyamide; threaded bush in nickel plated brass.

max. static load							
∅ mm.	25	30	35	38	40	50	60
N	5000	5500	5500	6000	6000	10000	12000

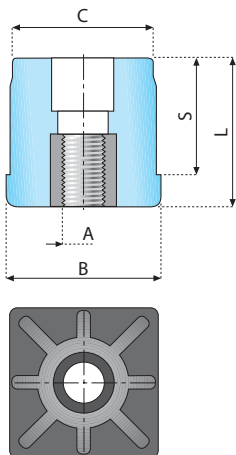

Stated load values are meant for static conditions.
Such values have to be adequately reduced in presence of high frequency vibrations or dynamic loads.
For further information contact our Engineering Department.

Threaded tube ends for square tubes

code	A	B mm.	C mm.	L mm.	S mm.	square tube		
						external diameter mm.	internal diameter mm.	thickness mm.
14824 14822 14823	M 8 M 10 M 12	25	22.5	30	25	25	22	1.5
14779 14780 14781 14782	M 10 M 12 M 14 M 16	30	27.5	33	27	30	27	1.5
14810 14811 14812 14813	M 10 M 12 M 14 M 16	30	26.5	33	27	30	26	2
14805 14806 14807 14808 14809	M 10 M 12 M 14 M 16 M 20	35	32.5	43	35	35	32	1.5
14825 14826 14827 14828 14829	M 10 M 12 M 14 M 16 M 20	35	31.5	43	35	35	31	2
14783 14756 14784 14757 14785	M 10 M 12 M 14 M 16 M 20	38	35.4	43	35	38.1	34.9	1.6
14786 14758 14759 14787 14788	M 10 M 12 M 14 M 16 M 20	38	32.6	43	35	38.1	32.1	3
14790 14769 14770 14771 14772	M 10 M 12 M 14 M 16 M 20	40	37.5	55	45	40	37	1.5
14600 14601 14602 14603 14604	M 10 M 12 M 14 M 16 M 20	40	36.5	55	45	40	36	2
14605 14606 14607 14608	M 12 M 14 M 16 M 20	50	47.5	55	44	50	47	1.5
14609 14610 14611 14612	M 12 M 14 M 16 M 20	50	46.5	55	44	50	46	2
14795 14796 14797 14798	M 12 M 14 M 16 M 20	50	45.5	55	44	50	45	2.5
14830 14831 14832	M 14 M 16 M 20	60	56.5	55	45	60	46	2