


8157 VG

STRAIGHT RUNNING CHAINS - HEAVY DUTY SINGLE HINGE WITH RUBBER PADS

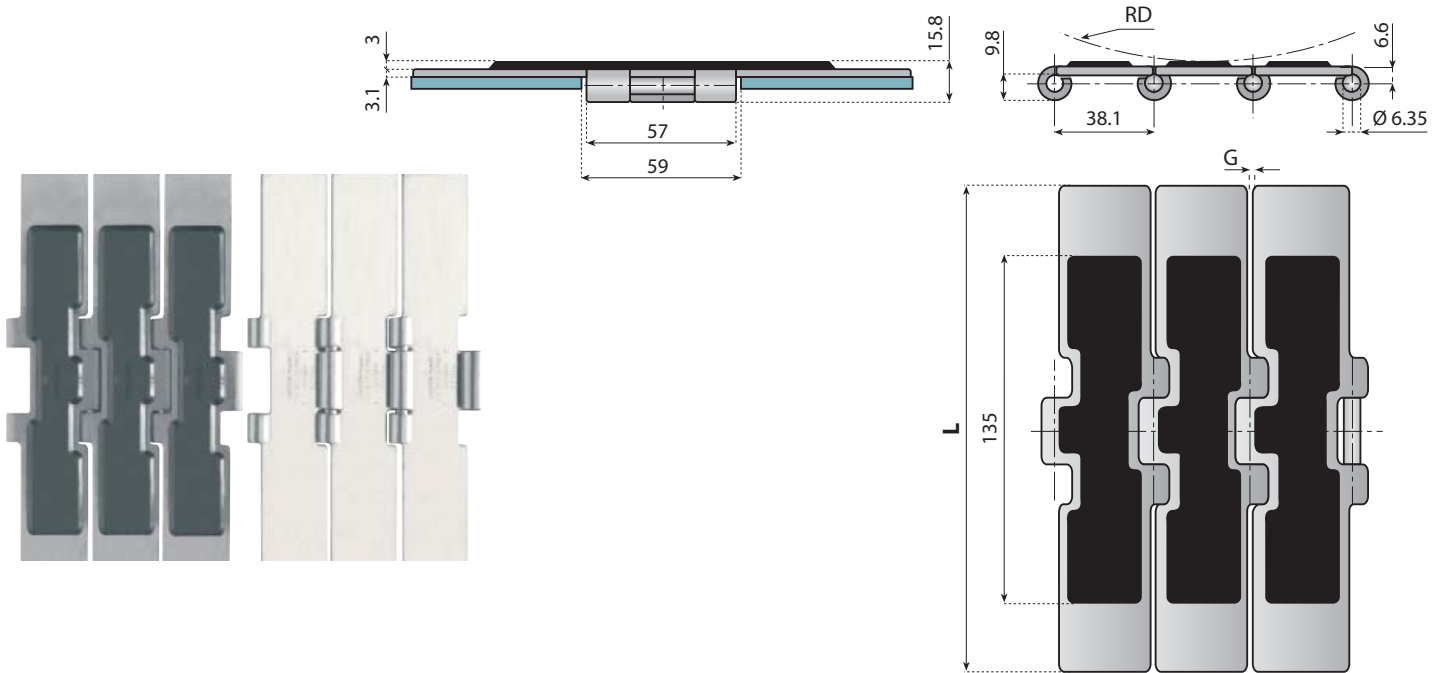

Characteristics:

Flat top chains with vulcanized NBR rubber.



Pages 4⇒7



Pages 278⇒280




Pages 333⇒337

TRAVEL →

Chain - Ref.	Code	Material		Max. working load	Width L		G mm	RD mm	Weight Kg/m
		Chain	Rubber		mm	inch			
SSE 8157 K750 VG	10512	EXTRA PLUS	NBR	10.400	190.5	7 ½	1.8	150	6.0
SSE 8157 K750 HB - VG	10515	HB							

8157 TAB VG

STRAIGHT RUNNING CHAINS - HEAVY DUTY SINGLE HINGE WITH RUBBER PADS

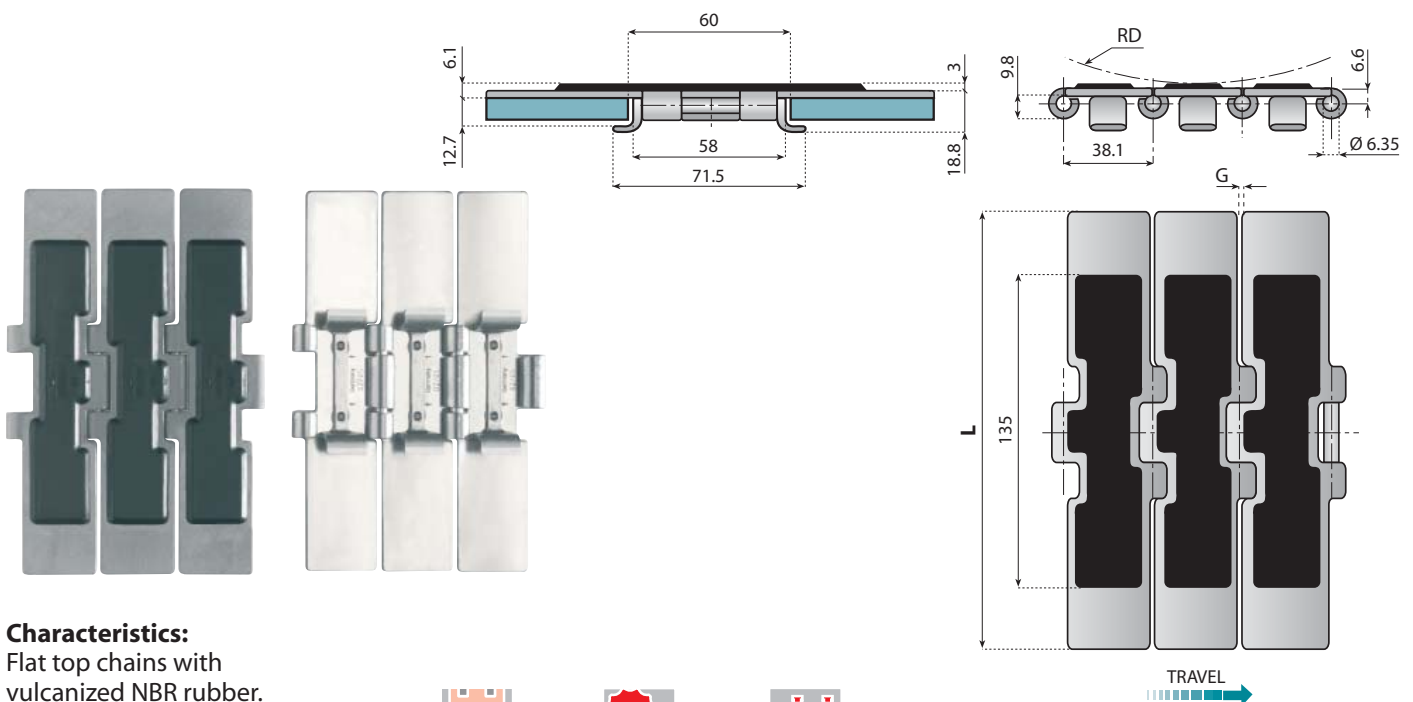

Characteristics:

Flat top chains with vulcanized NBR rubber. Tabs reduce friction on the return section of the conveyor.



Pages 4⇒7



Page 266



Pages 333⇒337

TRAVEL →

Chain - Ref.	Code	Material		Max. working load	Width L		G mm	RD mm	Weight Kg/m
		Chain	Rubber		mm	inch			
SSE 8157 TAB K750 VG	10514	EXTRA PLUS	NBR	10.400	190.5	7 ½	1.8	150	7.5
SSE 8157 TAB K750 HB - VG	10513	HB							

Standard length: 80 pitches (10 ft. - 3.048 m)

Breaking Load according to Standard ISO 4348 - DIN 8153