

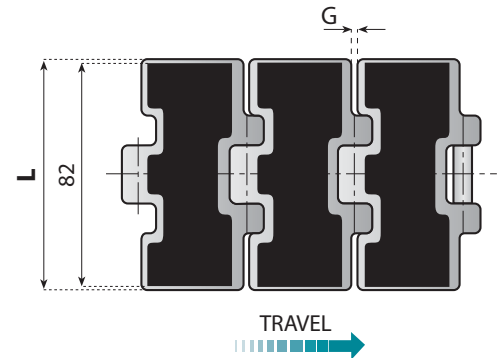
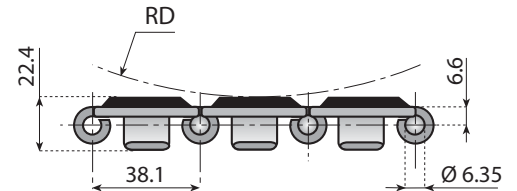


**Characteristics:**

Flat top chains with vulcanized NBR rubber. Tabs reduce friction on the return section of the conveyor.



Pages
4⇒7

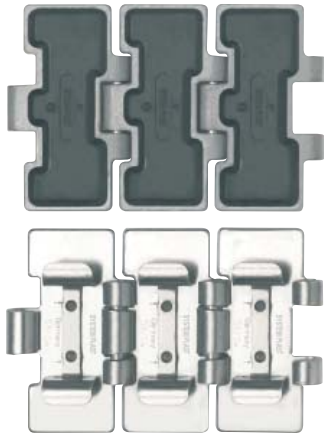

Pages
257+259



Pages
282⇒285







Pages
333⇒337

Chain - Ref.	Code	Material		Max. working load	Width L		G mm	RD mm	Weight Kg/m
		Chain	Rubber		mm	inch			
SSER 815 TAB K325 VG	10510	EXTRA PLUS	NBR	6.000	82.5	3 ¼	2.8	75	3.4

STRAIGHT RUNNING CHAINS DOUBLE HINGE WITH RUBBER PADS

805 VG

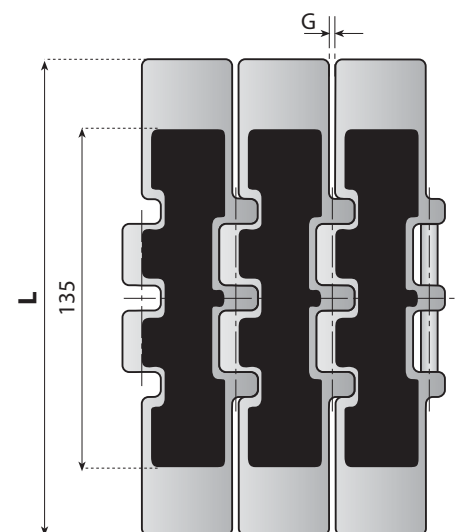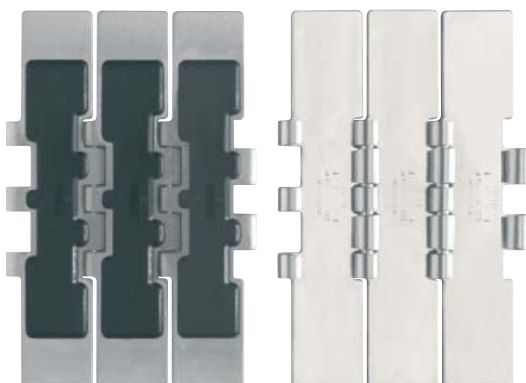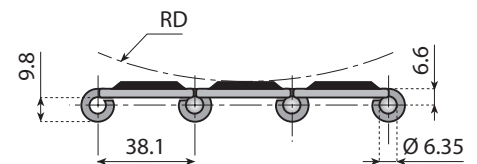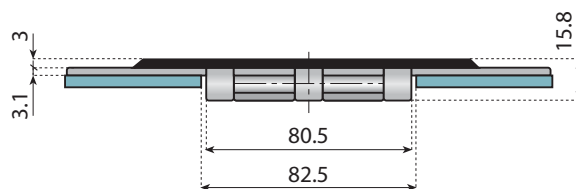**Characteristics:**

Flat top chains with vulcanized NBR rubber.



Pages
4⇒7



Pages
274⇒277



Pages
333⇒337

Chain - Ref.	Code	Material		Max. working load	Width L		G mm	RD mm	Weight Kg/m
		Chain	Rubber		mm	inch			
SSE 805 K750 VG	10502	EXTRA PLUS	NBR	15.000	190.5	7 ½	1.8	150	6.2