


815 VG

STRAIGHT RUNNING CHAINS SINGLE HINGE WITH RUBBER PADS

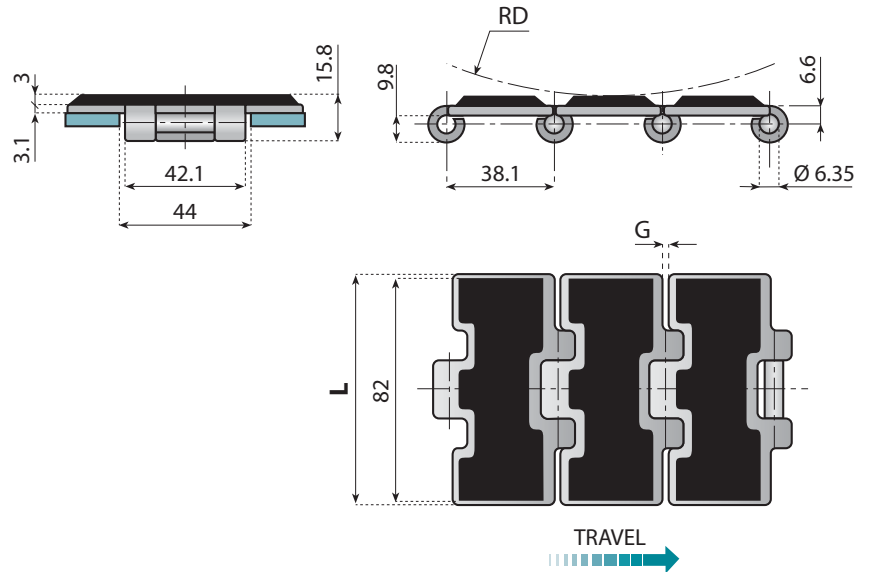

Characteristics:

Flat top chains with vulcanized NBR rubber.



Pages 4⇒7



Pages 266⇒270




Pages 333⇒337

Chain - Ref.	Code	Material		Max. working load	Width L		G mm	RD mm	Weight Kg/m
		Chain	Rubber		mm	inch			
SSER 815 K325 VG	10500	EXTRA PLUS	NBR	6.000	82.5	3 ¼	2.8	75	2.8

815 VG MINI

STRAIGHT RUNNING CHAINS MINI HINGE WITH RUBBER PADS

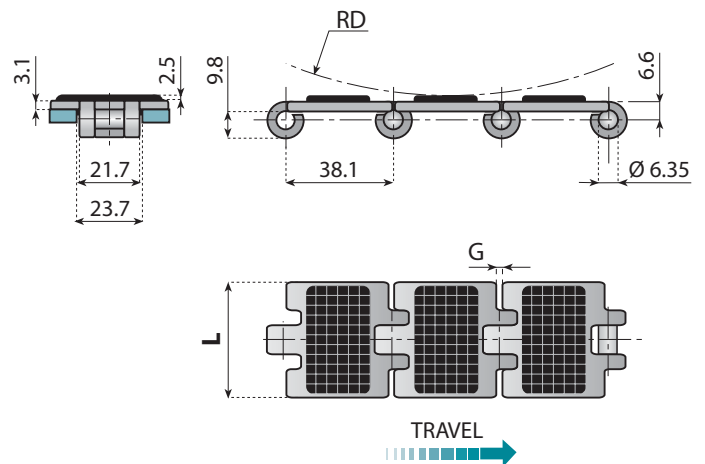

Characteristics:

Flat top chains with vulcanized NBR rubber.



Pages 4⇒7



Pages 271⇒272



Pages 333⇒337

Chain - Ref.	Code	Material		Max. working load	Width L		G mm	RD mm	Weight Kg/m
		Chain	Rubber		mm	inch			
SSER 815 K125 VG	10072	EXTRA PLUS	NBR	4.000	31.8	1 ¼	2.8	75	1.20

Standard length: 80 pitches (10 ft. - 3.048 m)

Breaking Load according to Standard ISO 4348 - DIN 8153