




Other Series: 881 VG - 8857 M VG

881 TAB VG SIDEFLEXING CHAINS with rubber pads

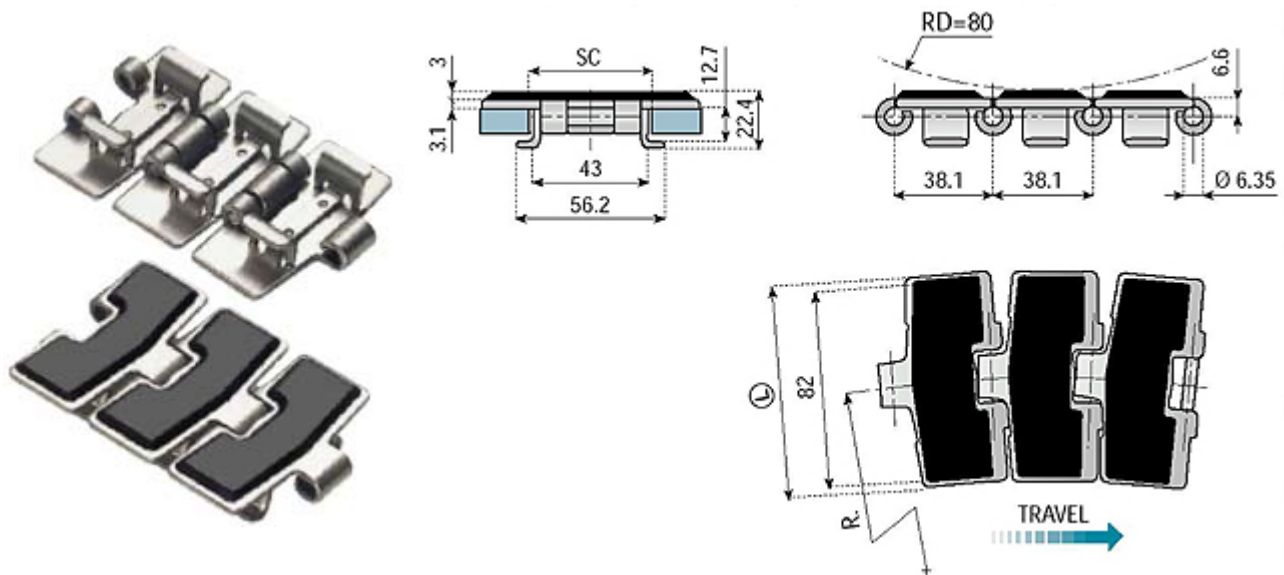

CHAIN - REF.	CODE	Material		Yield Point N	Width L		R min.	SC		Weight Kg/m
		Plate	Rubber		mm	inch.		Straight	Curving	
SSE 881 TAB K325 VG	10503	EXTRA	NBR	4850	82.5	3.1/4	457	46	45	3.1

Breaking Load according to Standard ISO 4348 - DIN 8153

EXTRA - Stainless Steel ([For further information](#))

NBR - N.B.R. Rubber

Standard length: 80 pitches (10 ft. - 3.048 m).

Characteristics: sideflexing chains with vulcanized N.B.R. rubber

Advantages:

- High resistance to wear and tearing • Working temperature from -30°C to +120°C
- High resistance to oil, grease and acids. • Conveyance up to max 20°



Chains Material



Sprockets



Corner Tracks



Straight Tracks



Chemical Resistance



Engineering Information



Print



Attention