




Other Series: 878 TAB VG - 879 TAB VG - 882 TAB VG - 882 M VG - 1873 VG

879 M VG SIDEFLEXING CHAINS FOR MAGNETIC SYSTEM with high friction surface

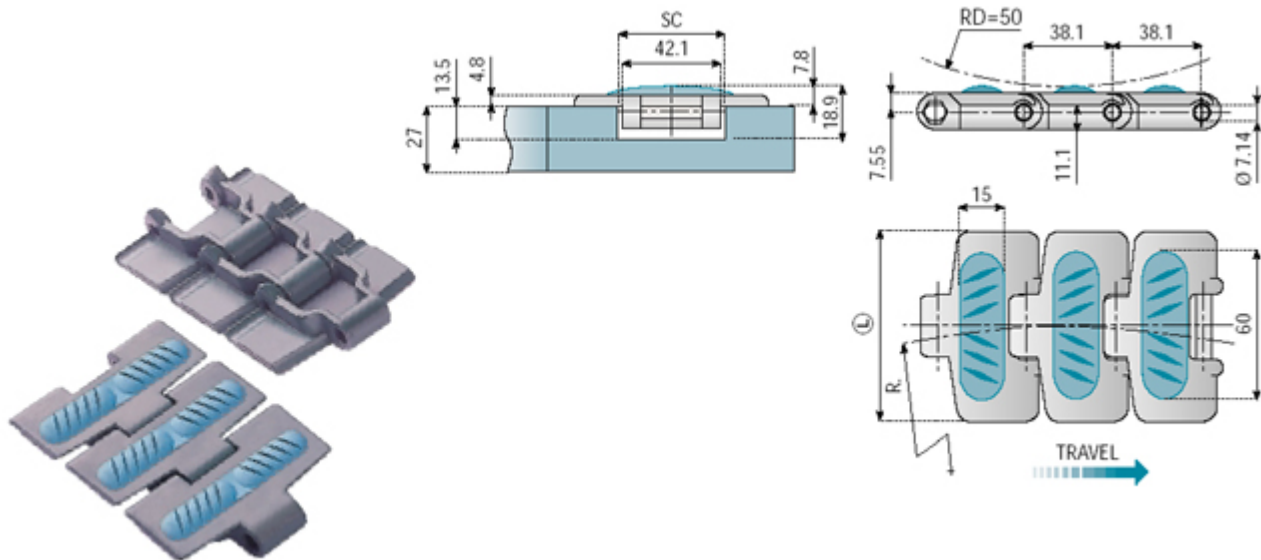

CHAIN - REF.	CODE	Material		Breaking Load N	Width L		R min.	SC		Weight Kg/m
		Chain	Rubber		mm	inch.		Straight	Curving	
NG 879 M K325 VG	11225	NG Dark Grey	TPR Water Blue 50 Shore A	5200	82.5	3.1 ¹ / ₄	457	45	44	1.15

NG - New Generation ([For further information](#))

TPR - Thermoplastic Rubber

SPECIAL CONFIGURATIONS ON REQUEST

Indicate the distance between the rubber pads at the time of ordering.

Standard length:

80 pitches (10 Ft. - 3.048 m)

Applications:

Food and beverage industry: Conveying products on inclined conveyors (can, bottle).

Packaging lines with inclined and declined conveyors (paper, board boxes PET bottle packs in heat shrink film - cans in heat shrink film - pasta bags)

Advantages:

- Better wear life
- Cleaner-less wear debris
- Lower energy consumption
- More efficient
- One conveyor construction
- Easy to clean
- Hygienic concept
- Easy maintenance

Pin material:

Ferritic Stainless Steel



**Chains
Material**



Sprockets



**Magnetic
Corner Tracks**



**Chemical
Resistance**



**Engineering
Information**



Print



Attention