




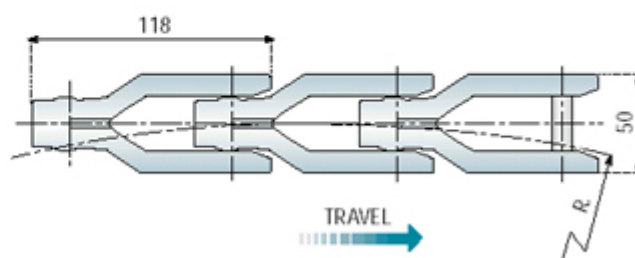


Other Series: CC 600 / CC 600 TAB - CC 600 P / CC 600 TAB P - CC 600 F / CC 631 TAB

CC 1400 - CC 1400 TAB CRATE CONVEYOR CHAINS

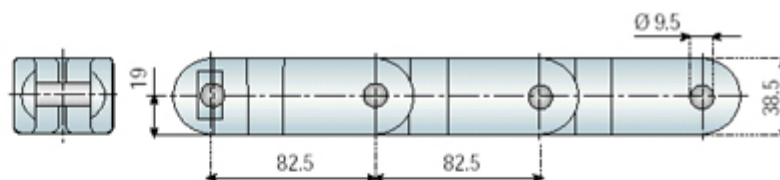

CC 1400

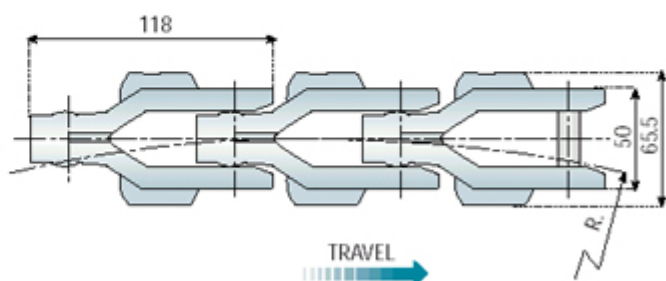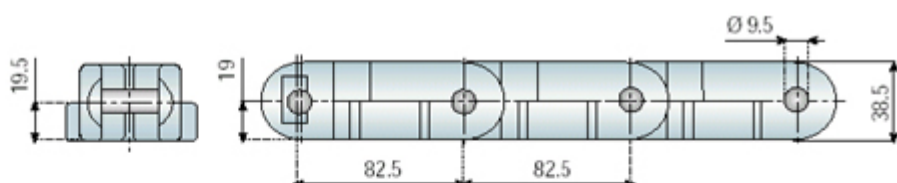

CC 1400 TAB

CHAIN - REF.	CODE	Material		R min.	Breaking Load N	Weight Kg/m
		Link	Pin			
CC 1400	11008	W	SS	660	18000	3.24
CC 1400 TAB	11010					3.44
NG 1400	11047	NG	SS	660	16000	3.24
NG 1400 TAB	11048					3.44
CC 1400 R	11008R	W	SS Riveted	660	18000	3.24
CC 1400 TAB-R	11010R					3.44

NG 1400 R	11047R	NG			16000	3.24
NG 1400 TAB-R	11048R					3.44

W - Acetal Resin (white) ([For further information](#))

NG - New Generation (green) ([For further information](#))

SS - Stainless Steel

Standard length:

37 pitches (10 Ft - 3.05 m)

Application:

- Transportation of plastic crates
- General purpose conveying applications

Advantages:

- High strength
- Curving radius capability
- Matt uniform finish
- Very high wear resistance
- Fully bidirectional



Chains Material



Sprockets



Chemical Resistance



Engineering Information



[Print](#)



[Attention](#)