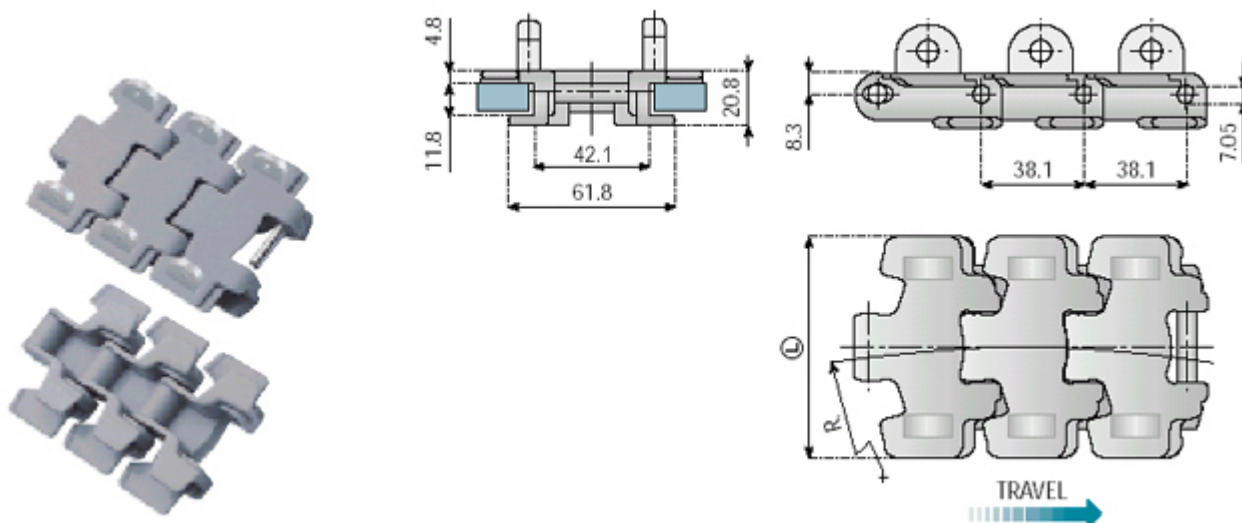




Other Series: 1873 GS

878 TAB GS SIDEFLEXING GRIPPER CHAINS



CHAIN - REF.	CODE	Material	Breaking Load N	Width L		R min.	SC		Weight Kg/m
				mm	inch.		Straight	Curving	
LFG 878 TAB GS K325	11387	LFG (Grey)	6000	82.5	3.1/4	190	46	45	0.90



878 TAB GS1

with gripper snap on

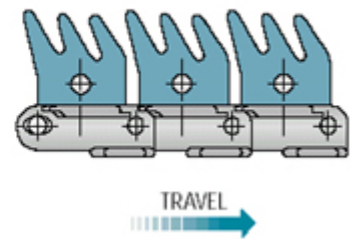



GS1

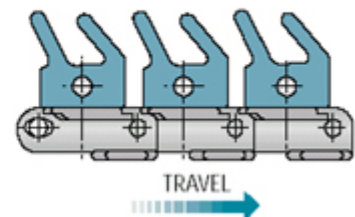

LIGHT APPLICATIONS



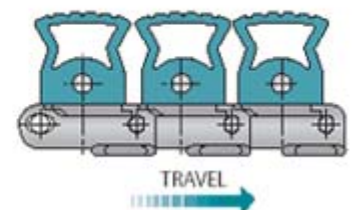

CHAIN - REF.	CODE	Kit Rubber Pin	Only Rubber	K mm	Material		Weight Kg/m
					Plate	Gripper	
LFG 878 TAB GS1 K325	11407	11736	11740	82	LFG (Grey)	THERMOPLASTIC	4.65

878 TAB GS2**with gripper snap on****GS 2****HEAVY APPLICATIONS**

CHAIN - REF.	CODE	Kit Rubber Pin	Only Rubber	K mm	Material		Weight Kg/m
					Plate	Gripper	
LFG 878 TAB GS2 K325	11408	11737	11742	82	LFG (Grey)	THERMOPLASTIC	4.05

878 TAB GS3**with gripper snap on****GS 3****SPECIAL APPLICATIONS**

CHAIN - REF.	CODE	Kit Rubber Pin	Only Rubber	K mm	Material		Weight Kg/m
					Plate	Gripper	
LFG 878 TAB GS3 K325	11409	11738	11744	82	LFG (Grey)	THERMOPLASTIC	3.95

878 TAB GS4**with gripper snap on****GS 4****SPECIAL APPLICATIONS**

CHAIN - REF.	CODE	Kit Rubber Pin	Only Rubber	K mm	Material		Weight Kg/m
					Plate	Gripper	

LFG 878 TAB GS4 K325	11404	11739	11746	82	LFG (Grey)	THERMOPLASTIC	4.10
----------------------------	--------------	--------------	--------------	----	----------------------	----------------------	------

LFG - Low Friction Acetal Resin ([For further information](#))

R.190 mm SIDEFLEXING RADIUS

Standard length:

80 pitches (10 Ft. - 3.048 m).

Advantages:

- Exceptional durability
- Optimum performance
- Extremely low noise level
- Removable gripper
- Rubber pads with high resistance
- Not suitable with oils
- Resistant to weak acid



**Chain
Material**



Sprockets



**Corner
Tracks**



**Straight
Tracks**



**Turning
disks I°**



**Turning
disks II°**



**Chemical
Resistance**



Print



Attention