



Product guides



METAL PROFILE

Supply: 3 or 6 meters.


Packaging: 30 meters.



EXTRUDED PROFILE

Supply: 3 or 6 meters.

Packaging: 30 meters.

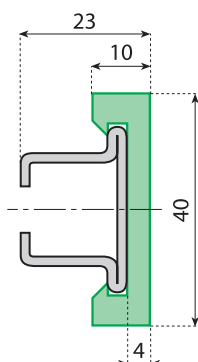

GUIDE RAILS

Supply: 3 or 6 meters.

Packaging: 30 meters.

Notes: the steel profile and wear strip are supplied assembled.

GUIDE RAILS

Material:

- Metal profile, see the table.
- Plastic profile in UHMWPE.

Characteristics:

- Very low friction coefficient.
- High resistance to chemical agents.
- No liquid absorption.

Supply:

- 3 or 6 meters.
- Steel profile and plastic profile are supplied assembled.



Polyethylene



Polyethylene antistatic



304 Stainless steel



430 Stainless steel




Accessories



Consult pages 105 -> 107 for bending machines

These profiles are applicable to code 19048 - 19048C cod. 19070 - 19071



Code	Metal profile material	Length	Weight Kg/m
19048C	S/S AISI 304	3 m	0.90
19048	S/S AISI 304	6 m	0.90
19048KC	S/S AISI 430	3 m	0.90
19048K	S/S AISI 430	6 m	0.90

Code	Colour	Length	Weight Kg/m
19071C	Black	3 m	0.20
19071	Black	6 m	0.20
19070C	Green	3 m	0.20
19070	Green	6 m	0.20
19070BC	White	3 m	0.20
19070B	White	6 m	0.20
19071ASC	Antistatic black	3 m	0.20
19071AS	Antistatic black	6 m	0.20

Code	Colour	Metal profile material	Length	Weight Kg/m
19063NC	Black	S/S AISI 304	3 m	1.10
19063N	Black		6 m	1.10
19063VC	Green		3 m	1.10
19063V	Green		6 m	1.10
19063BC	White		3 m	1.10
19063B	White		6 m	1.10
19063ASC	Antistatic black	S/S AISI 430	3 m	1.10
19063AS	Antistatic black		6 m	1.10
19063KNC	Black		3 m	1.10
19063KN	Black		6 m	1.10
19063KVC	Green		3 m	1.10
19063KV	Green		6 m	1.10
19063KBC	White	S/S AISI 430	3 m	1.10
19063KB	White		6 m	1.10
19063KASC	Antistatic black		3 m	1.10
19063KAS	Antistatic black		6 m	1.10