

Product guides

GUIDE RAILS

Material:

- Metal profile in anodized aluminium.
- Plastic profile in UHMWPE.

Characteristics:

- Very low friction coefficient.
- High resistance to chemical agents.
- No liquid absorption.

Supply:

- 3 or 6 meters.
- Metal profile and guide rails are supplied assembled.



Polyethylene



Polyethylene antistatic





Anodized aluminium



Accessories




Consult pages
105 → 107 for
bending machines

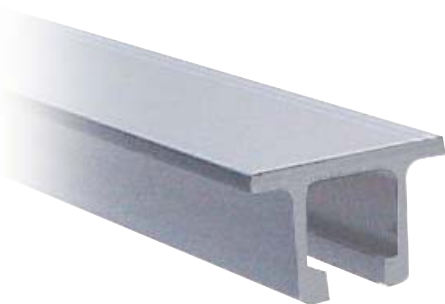

ALUMINIUM PROFILE

Supply: 3 or 6 meters.


Packaging: 30 meters.



EXTRUDED PROFILE

Supply: 3 or 6 meters.

Packaging: 30 meters.

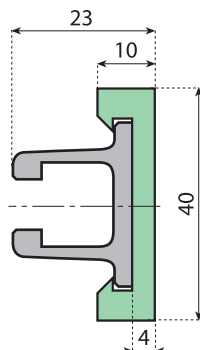

GUIDE RAILS

Supply: 3 or 6 meters.

Packaging: 30 meters.

Notes: the aluminium profile and guide rails are supplied assembled.

Code	Length	Weight Kg/m
19097L	3 m	0.50
19097	6 m	0.50

Code	Colour	Length	Weight Kg/m
19071C	Black	3 m	0.20
19071	Black	6 m	0.20
19070C	Green	3 m	0.20
19070	Green	6 m	0.20
19070BC	White	3 m	0.20
19070B	White	6 m	0.20
19071ASC	Antistatic black	3 m	0.20
19071AS	Antistatic black	6 m	0.20

Code	Colour	Length	Weight Kg/m
19098N	Black	3 m	0.70
19098NL	Black	6 m	0.70
19098V	Green	3 m	0.70
19098VL	Green	6 m	0.70
19098B	White	3 m	0.70
19098BL	White	6 m	0.70
19098AS	Antistatic black	3 m	0.70
19098ASL	Antistatic black	6 m	0.70

These profiles are applicable
to code 19097 - 19097L
cod. 19070 - 19071

