

Split shafting collars

SPLIT SHAFTING COLLAR

Material: acetal resin, bolts in stainless steel, threaded insert in nickel plated brass.

Use: these parts can be used on the conveyors as a reference point when the side guides need to be repositioned.

Note: The new collars offer high corrosion resistance. The new part exhibits high strength at considerably less cost than stainless steel.

The new collars are the ideal replacement for conventional al collars in situation where they cannot be easily removed and replaced.

Supply: assembled.

Packaging: 100 pieces.








Acetal resin



304 Stainless steel



Nickel plated brass

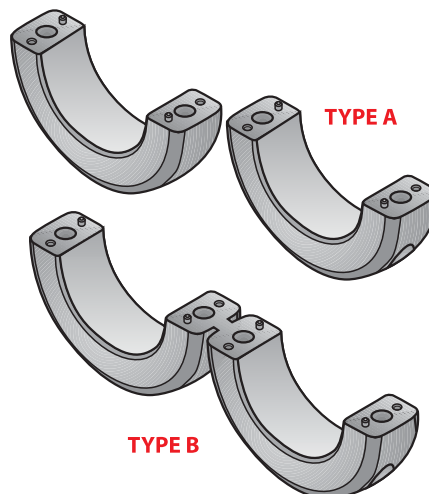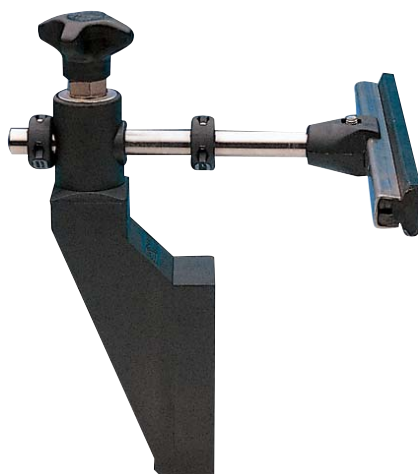

Code	Type	d	D	L	K	Screws
12696	B	10	30	12	20	M3
12698	A	12	30	12	20	M3
12700	A	14	28	12	20	M3
12697	B	15	39	14	27	M4
12701	A	16	30	12	22	M3
12699	A	18	39	14	27	M4
12702	A	20	39	14	29	M4
12703	A	25	44	14	34	M4
12704	A	30	49	16	39	M4
12714	B	30	49	14	39	M4
12705	A	35	56	16	45	M4
12706	A	40	64	18	51.5	M5
12715	B	40	64	14	51.5	M4

Split shafting collars for shaft with keyway



Acetal resin



304 Stainless steel





Nickel plated brass



Polyamide



Range extension

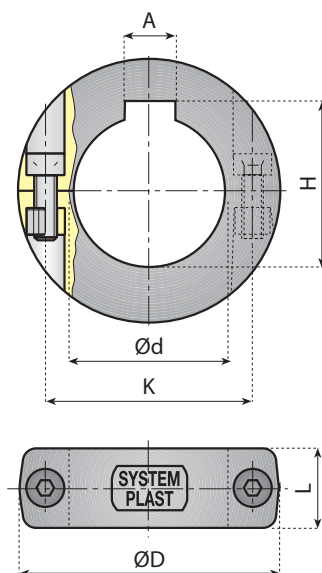

SPLIT SHAFTING COLLAR



Material: reinforced polyamide, screws in stainless steel, threaded insert in nickel plated brass.

Use: for shaft with key way.

Supply: assembled.

Packaging: 100 pieces.

Code	d	D	A	H	L	K	Screws
12710	25	45	8	P9 28.3 ^{+0.2} ₀	14	34	M4
12709	30	50	8	P9 33.3 ^{+0.2} ₀	16	39	M4
12708	35	57	10	P9 38.3 ^{+0.2} ₀	16	45	M4
12707	40	64	12	P9 43.3 ^{+0.2} ₀	18	51.5	M5

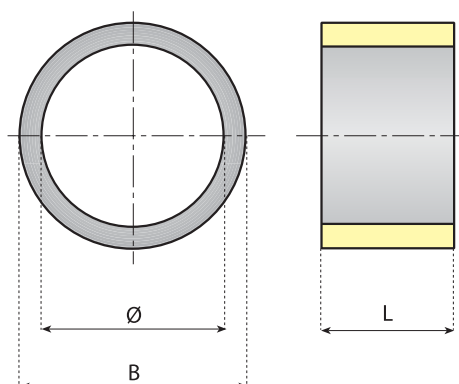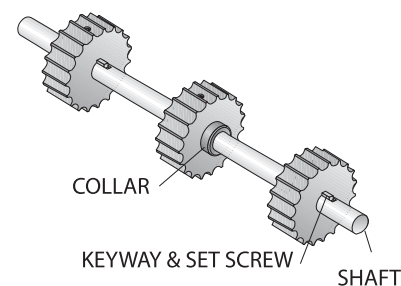

IDLER SPACER

Material: polyamide.

Packaging: 50 pieces.

Code	For shaft Ø	B	L
12829	30	40	29
12830	40	50	29