

## Side mounting top brackets




**SIDE MOUNTING TOP BRACKET**  
with expansion plug for round  
tubes Ø 48.3x1.5 mm

**Components:** external part in reinforced polyamide.  
Conical insert in reinforced polyamide.  
Threaded bushing in nickel plated brass.  
Bolt and washer in stainless steel.

**Note:** max recommended tightening torque 2.5 Kgm.

**Application:** the bracket can be inclined by 30°.

**Packaging:** 25 pieces.

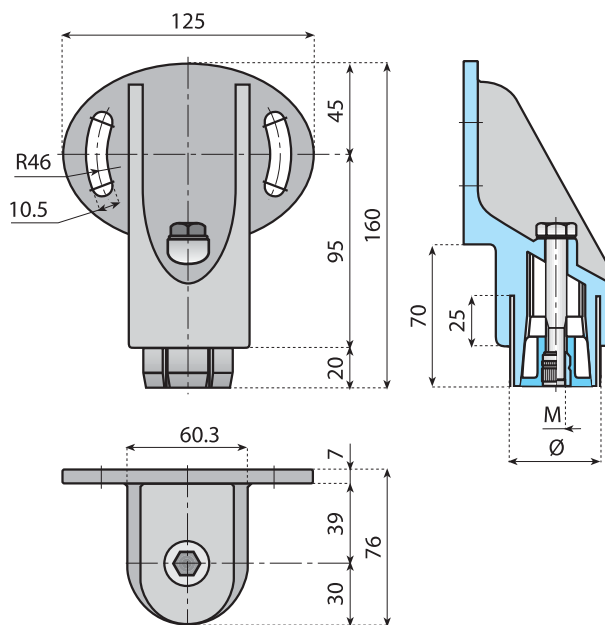

Code	M	For tube Ø
14071	8	48.3
14070	10	48.3
14068	8	50.9
14069	10	50.9



304 Stainless steel



Nickel plated brass



Polyamide




**SIDE MOUNTING TOP BRACKET**  
with expansion plug for square  
tubes 40x40x2 mm

**Components:** external part in reinforced polyamide.  
Conical insert in reinforced polyamide.  
Threaded bushing in nickel plated brass.  
Bolt and washer in stainless steel.

**Note:** max recommended tightening torque 2.5 Kgm.

**Application:** the bracket can be inclined by 30°.

**Packaging:** 25 pieces.

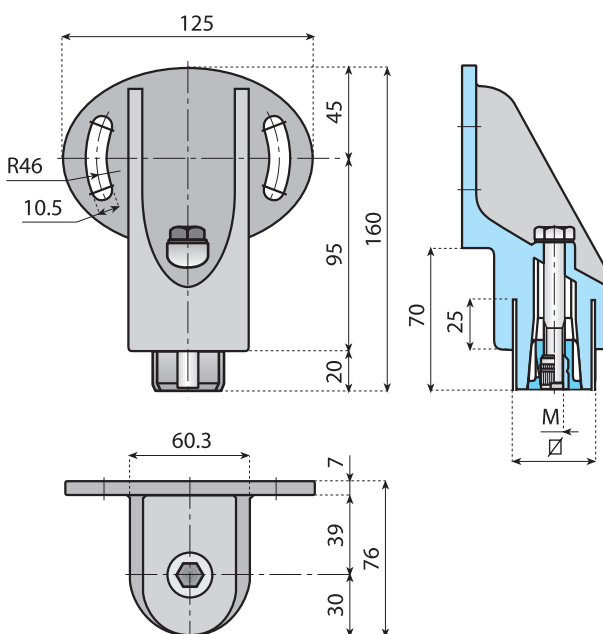

Code	M	For tube ▯
14073	8	40x40
14072	10	40x40