


Threaded tube ends **for round tubes**



TECHNICAL INFORMATION

- **Material:**
Polyamide; threaded bush in
nickel plated brass.

max. static load						
Ø mm.	30	38	42	48	50	60
N	3000	5000	6000	6000	6500	8000

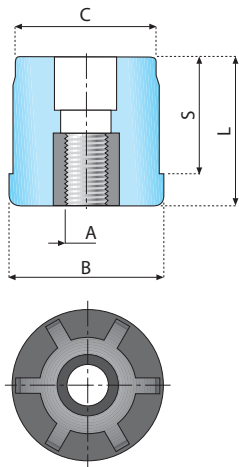

Stated load values are meant for static conditions.
Such values have to be adequately reduced in presence of high frequency vibrations or dynamic loads.
For further information contact our Engineering Department.

Threaded tube ends **for round tubes**

code	A	B mm.	C mm.	L mm.	S mm.	round tube		
						external diameter mm.	internal diameter mm.	thickness mm.
14799 14800 14801	M 10 M 12 M 14	30	28.4	35	29	30	28	1
14773 14752 14774 14764	M 10 M 12 M 14 M 16	38	35.5	46.5	38	38	35	1.5
14775 14763 14776 14750 14765	M 10 M 12 M 14 M 16 M 20	42	39.9	45.5	38	42.4	39.4	1.5
14766 14777 14767 14751	M 12 M 14 M 16 M 20	48	45.8	55	45	48.3	45.3	1.5
14754 14778 14755 14768	M 12 M 14 M 16 M 20	50	48.4	49	38	50.9	47.9	1.5
14791 14792	M 16 M 20	60	58	50	38	60.3	57.3	1.5
14793 14794	M 16 M 20	60	57	50	38	60.3	56.3	2.0
14802 14803 14804	M 16 M 20 M 24	60	56	50	38	60.3	55.3	2.5