




Pages
4⇒7



Pages
248+253

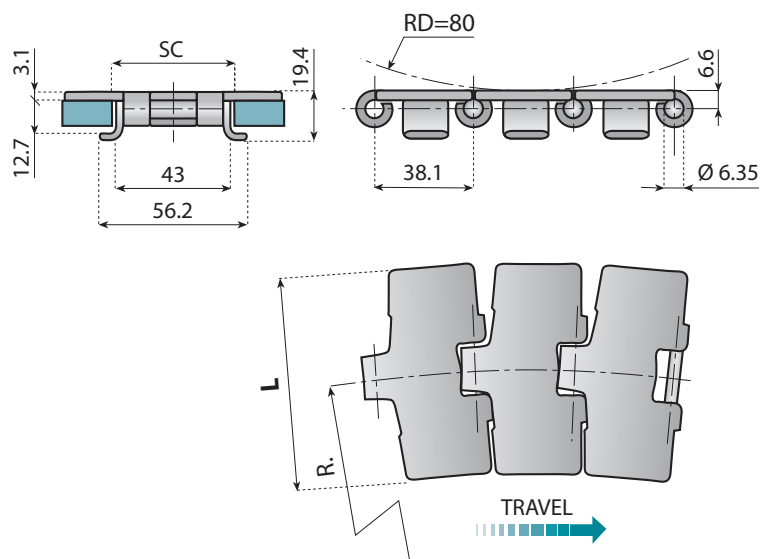

Pages
257+259




Pages
282⇒285



Pages
333⇒337

Chain - Ref.	Code	Material	Max. working load	Finish µm	Width L		R min.	SC	Weight Kg/m
					mm	inch			
SSE 881 TAB K325	10104	EXTRA	4.850	0.3	82.5	3 ¼	500	45	3.00
SSE 881 TAB K450	10105				114.3	4 ½			3.70
SSE 881 TAB K750	10106				190.5	7 ½			5.50
SSA 881 TAB K325	10110	AUSTIC	4.500		82.5	3 ¼			3.00
SSA 881 TAB K450	10111				114.3	4 ½			3.70
SSA 881 TAB K750	10112				190.5	7 ½			5.50

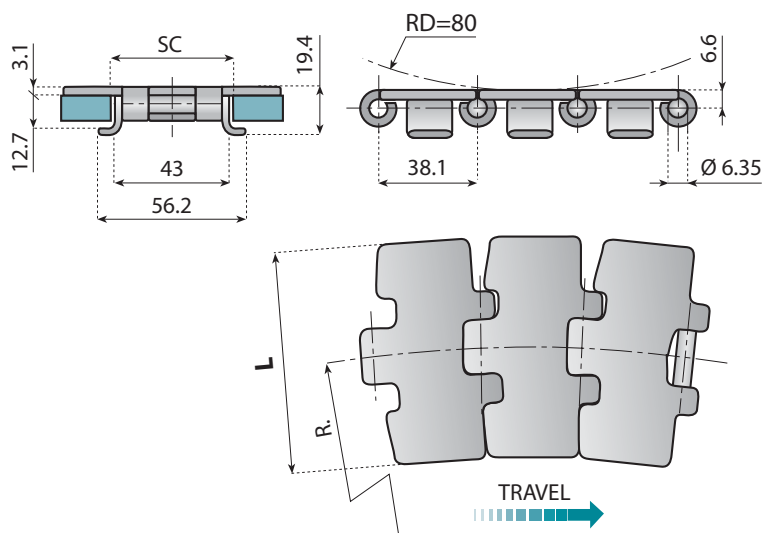

The enlarged surface of our 881O series offers improved product support compared to the 881 series.



Pages
4⇒7



Pages
248+253



Pages
257+259



Pages
282⇒285



Pages
333⇒337

Chain - Ref.	Code	Material	Max. working load	Finish µm	Width L		R min.	SC	Weight Kg/m
					mm	inch			
SSE 881O TAB K325	10403	EXTRA PLUS	6.000	0.3	82.5	3 ¼	500	45	3.00
SSE 881O TAB K350	10420				88.9	3 ½			3.20
SSE 881O TAB K450	10404				114.3	4 ½			3.70
SSE 881O TAB K750	10405				190.5	7 ½			5.50

Standard length: 80 pitches (10 ft. - 3.048 m)

Breaking Load according to Standard ISO 4348 - DIN 8153