



**Advantages:**

- High strength

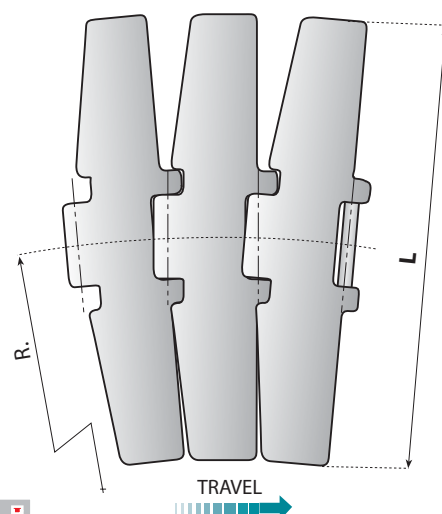

Pages 4⇒7

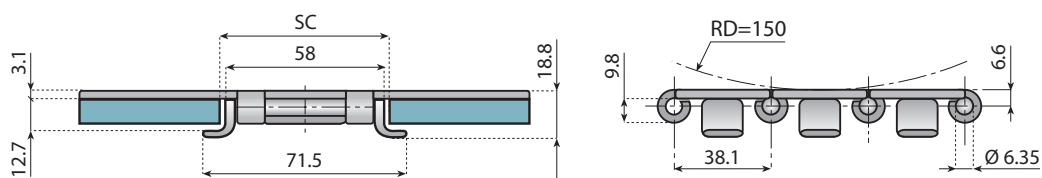

Page 266





Pages 333⇒337

Chain - Ref.	Code	Material	Max. working load	Finish μm	Width L		R min.	SC	Weight Kg/m
					mm	inch			
SSE 8857 TAB K750	10219	EXTRA PLUS	10.400	0.3	190.5	7 1/2	750	61	6.10
SSE 8857 TAB K750 HB	10220	HB							

Standard length: 80 pitches (10 ft. - 3.048 m)

1874 SIDEFLEXING PLATE TOP CHAINS WITH BASE ROLLER CHAINS 19.05 mm (3/4 ") PITCH

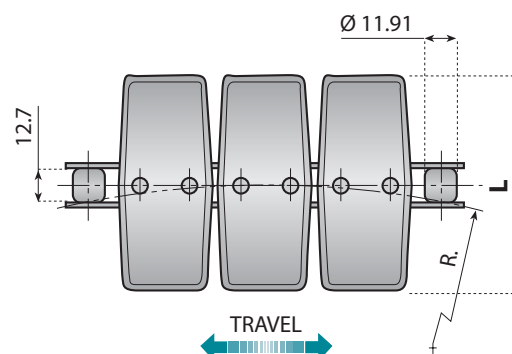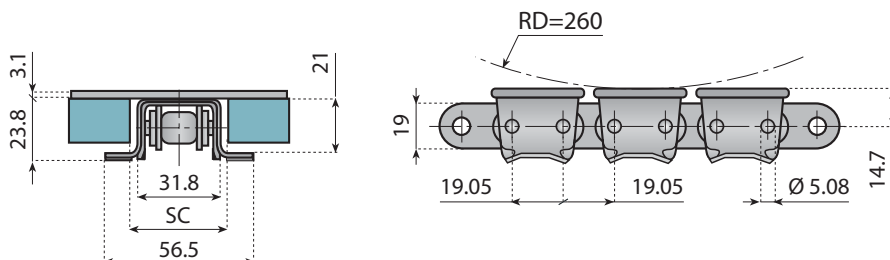**Advantages:**

- High speed
- Very high loads
- Longer conveyors
- Flights removeable
- Lower noise
- No chain elongation



Pages 4⇒7



Page 252



Page 259



Page 301



Pages 333⇒337

Chain - Ref.	Code	Material		Max. working load	Finish μm	Width L		R min.	SC	Weight Kg/m
		Plate	Roller chain			mm	inch			
1874 K325	11830	C45	C45	27.000	0.6	82.5	3 1/4	380	35	4.2
1874 SS K325	11831	EXTRA	AUSTIC	21.000						
1874A K325	11832		C45	27.000						

Standard length: 160 pitches (10 ft. - 3.048 m)

Breaking Load according to Standard ISO 4348 - DIN 8153