


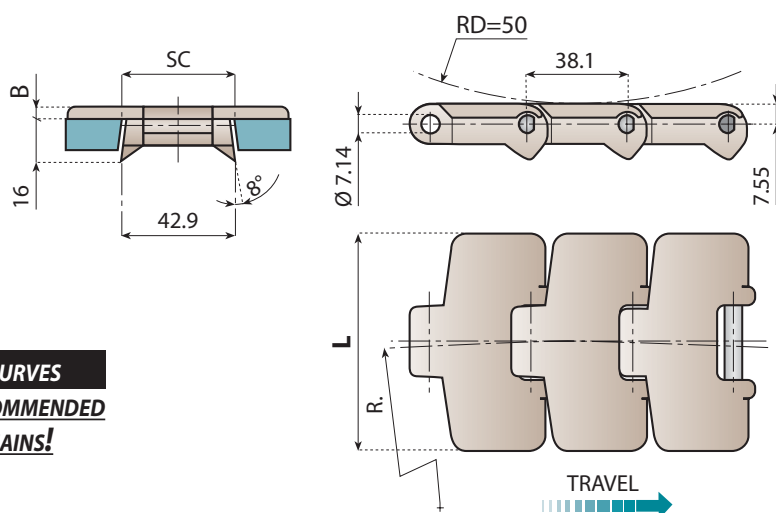

"NOLU-S" CURVES
ARE STRONGLY RECOMMENDED
WITH THESE CHAINS!

Note:

The 879 series has a thicker top plate (4.8 mm) giving much more wear life. It also simplifies conveyor design when matching chains from the series 821, 831, 8257 and 882.

On request and for adequate quantities these chains can be produced in:

AR	D	AS	CR	HT
Abrasion Resistance	Grey Acetal Resin	Anti-static Acetal Resin	Chemical Resistance	High Temperature Resistance



Pages 4→7



Pages 249+253



Pages 257+260



Pages 293→294



Pages 333→337

Pin material: Austenitic steel

Chain - Ref.	Code	Material plate	Breaking load N	Width L		B Thickness mm	R min.	SC		Weight Kg/m
				mm	inch			Straight	Curving	
LF 880 K325	11383	LF Brown	6.000	82.5	3 ¼	4	500	44.5	41.3	0.89
LF 880 K350	11189			88.9	3 ½					0.92
LF 880 K450	11386			114.3	4 ½					1.04
XPG 880 K325	11502G	XPG Dark Brown	5.700	82.5	3 ¼					0.89
XPG 880 K350	11188G			88.9	3 ½					0.92
XPG 880 K450	11503G			114.3	4 ½					1.04
NG 880 K325	11187	NG Green	5.000	82.5	3 ¼					0.89
NG 880 K350	11186			88.9	3 ½					0.92
NG 880 K450	11185			114.3	4 ½					1.04

LF 879 K325	11506	LF Brown	6.000	82.5	3 ¼	4.8	500	44.5	41.3	0.93
LF 879 K450	11507			114.3	4 ½					1.10
XPG 879 K325	11508G	XPG Dark Brown	5.700	82.5	3 ¼					0.93
XPG 879 K450	11509G			114.3	4 ½					1.10
NG 879 K325	11193	NG Green	5.000	82.5	3 ¼					0.93
NG 879 K450	11194			114.3	4 ½					1.10

Standard length: 80 pitches (10 ft. - 3.048 m)

Breaking Load according to Standard ISO 4348 - DIN 8153