


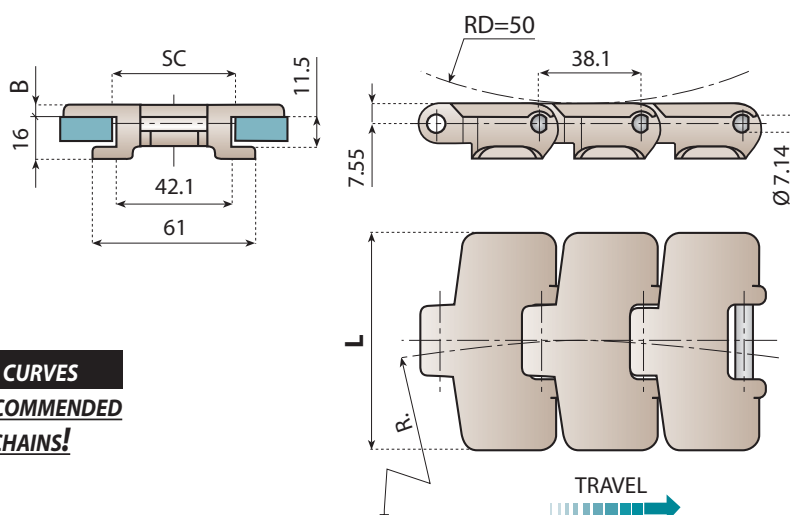

"NOLU-S" CURVES
ARE STRONGLY RECOMMENDED
WITH THESE CHAINS!

Note:

The 879 TAB series has a thicker top plate (4.8 mm) giving much more wear life. It also simplifies conveyor design when matching chains from the series 821, 831, 8257 and 882.

On request and for adequate quantities these chains can be produced in:

AR	D	AS	CR	HT
Abrasion Resistance	Grey Acetal Resin	Anti-static Acetal Resin	Chemical Resistance	High Temperature Resistance



Pages
4→7



Pages
248+253



Pages
257+259



Pages
293→295



Pages
333→337

Pin material: Austenitic Steel

Chain - Ref.	Code	Material plate	Breaking load N	Width L		B Thickness mm	R min.	SC	Weight Kg/m
				mm	inch				
LF 880 TAB K325	11377	LF Brown	6.000	82.5	3 ¼	4	500	45	0.94
LF 880 TAB K330	11259			83.8	3 ⅞				0.96
LF 880 TAB K350	11190			88.9	3 ½				1.01
LF 880 TAB K450	11380			114.3	4 ½				1.08
XPG 880 TAB K325	11500G	XPG Dark Brown	5.700	82.5	3 ¼				0.94
XPG 880 TAB K330	11260G			83.8	3 ⅞				0.96
XPG 880 TAB K350	11191G			88.9	3 ½				1.01
XPG 880 TAB K450	11501G			114.3	4 ½				1.08
NG 880 TAB K325	11195	NG Green	5.000	82.5	3 ¼				0.94
NG 880 TAB K330	11261			83.8	3 ⅞				0.96
NG 880 TAB K350	11196			88.9	3 ½				1.01
NG 880 TAB K450	11197			114.3	4 ½				1.08
LF 879 TAB K325	11377ST	LF Brown	6.000	82.5	3 ¼	4.8	500	45	0.98
LF 879 TAB K450	11380ST			114.3	4 ½				1.14
XPG 879 TAB K325	11504G	XPG Dark Brown	5.700	82.5	3 ¼				0.98
XPG 879 TAB K450	11505G			114.3	4 ½				1.14
NG 879 TAB K325	11198	NG Green	5.000	82.5	3 ¼				0.98
NG 879 TAB K450	11199			114.3	4 ½				1.14

Standard length: 80 pitches (10 ft. - 3.048 m)

Breaking Load according to Standard ISO 4348 - DIN 8153