
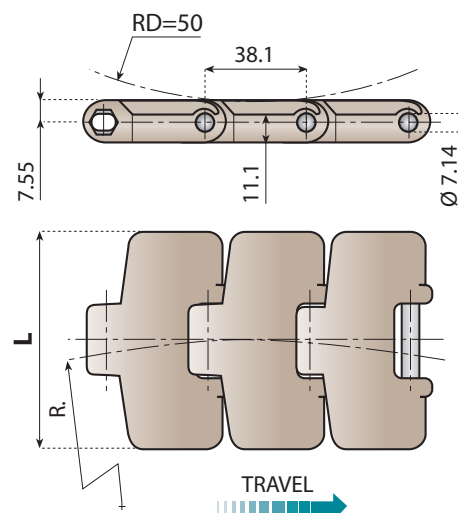


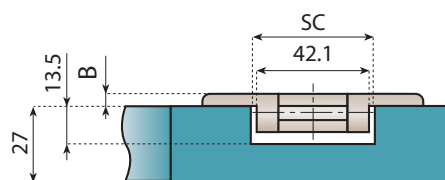

"NOLU-S" CURVES
ARE STRONGLY RECOMMENDED
WITH THESE CHAINS!

Note:

The 879M series has a thicker top plate of 4.8 mm, giving much more wear life. It also simplifies conveyor design when matching chains from the series 821 - 831 - 882 - 8257

Advantages:

- One conveyor construction
- Easy to clean
- Easy maintenance
- Improved wear life
- Hygienic concept

Pin material:

Ferritic Stainless Steel

Characteristics:

Plastic magnetic system chains do not have TAB or BEVEL shoes. The ferritic stainless steel pins are securely retained in position by the magnets located in the upper section of the curve. These chains can be easily removed from the curve for maintenance or cleaning, without dismantling the chain.



Pages 4→7



Pages 196→214



Page 260



Pages 293→294



Pages 333→337

Chain - Ref.	Code	Material plate	Breaking load N	Width L		B Thickness mm	R min.	SC	Weight Kg/m
				mm	inch				
LF 880 M K325	11377M	LF Brown	5.700	82.5	3 ¼	4	500	45	1.05
LF 880 M K330	11222M			83.8	3 ⅞				1.08
LF 880 M K450	11380M			114.3	4 ½				1.15
LF 880 M K750	11393M			190.5	7 ½				1.50
XPG 880 M K325	11500MG	XPG Dark Brown	5.500	82.5	3 ¼				1.05
XPG 880 M K330	11223MG			83.8	3 ⅞				1.08
XPG 880 M K450	11501MG			114.3	4 ½				1.15
XPG 880 M K750	11394MG			190.5	7 ½				1.50
NG 880 M K325	11195M	NG Green	5.200	82.5	3 ¼				1.05
NG 880 M K330	11224M			83.8	3 ⅞				1.08
NG 880 M K450	11197M			114.3	4 ½				1.15
NG 880 M K750	11420M			190.5	7 ½				1.50
LF 879 M K325	11395M	LF Brown	5.700	82.5	3 ¼	4.8	500	45	1.15
LF 879 M K450	11396M			114.3	4 ½				1.25
XPG 879 M K325	11397MG	XPG Dark Brown	5.500	82.5	3 ¼				1.15
XPG 879 M K450	11398MG			114.3	4 ½				1.25
NG 879 M K325	11198M	NG Green	5.200	82.5	3 ¼				1.15
NG 879 M K450	11421M			114.3	4 ½				1.25

Standard length: 80 pitches (10 ft. - 3.048 m)

Breaking Load according to Standard ISO 4348 - DIN 8153