





Pages
4⇒7

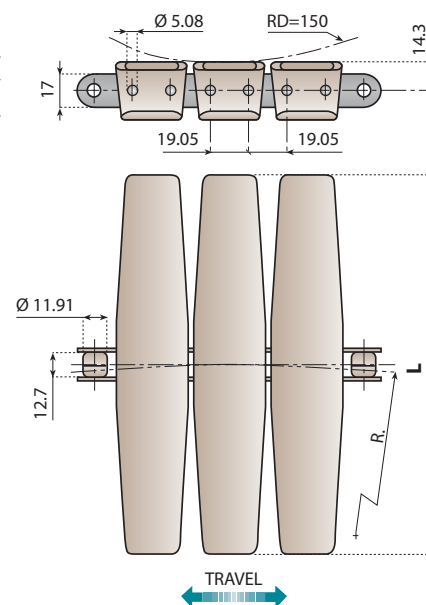

Page
252

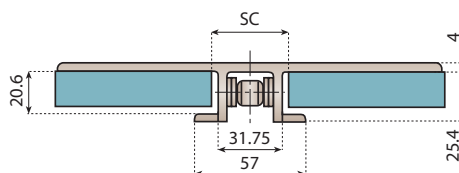

Page
259



Page
301



Pages
333⇒337

"NOLU-S" CURVES

**ARE STRONGLY RECOMMENDED
WITH THESE CHAINS!**

Chain - Ref.	Code	Material		Breaking load N	Width L		R min.	SC		Weight Kg/m								
		Roller chain	Plate		mm	inch		Straight	Curving									
LF 1873 K225	11633	C45	LF Brown	27.000	57.1	2 ¼	380	33.3	35	2.00								
LF 1873 K325	11634				82.5	3 ¼				2.10								
LF 1873 K450	11635				114.3	4 ½				2.23								
LF 1873 K600	11636				152.4	6	500			2.40								
LF 1873 K750	11637				190.5	7 ½				2.60								
LF 1873 K1000	11638				254.0	10				2.80								
LF 1873 K1200	11639		304.8		12	610	3.00											
XPG 1873 K225	11706G		XPG Dark Brown		NG Green	27.000	57.1			2 ¼	380	33.3	35	2.00				
XPG 1873 K325	11531G						82.5			3 ¼				2.10				
XPG 1873 K450	11532G						114.3			4 ½				2.23				
XPG 1873 K600	11533G						152.4			6	500			2.40				
XPG 1873 K750	11534G						190.5			7 ½				2.60				
XPG 1873 K1000	11535G						254.0			10				2.80				
XPG 1873 K1200	11536G		304.8		12		610			3.00								
NG 1873 K225	11707		NG Green		NG Green		27.000			57.1	2 ¼			380	33.3	35	2.00	
NG 1873 K325	11688									82.5	3 ¼						2.10	
NG 1873 K450	11689									114.3	4 ½						2.23	
NG 1873 K600	11690									152.4	6			500			2.40	
NG 1873 K750	11691									190.5	7 ½						2.60	
NG 1873 K1000	11692									254.0	10						2.80	
NG 1873 K1200	11693		304.8		12					610	3.00							
LF 1873 SS K225	11663	AUSTIC	LF Brown	21.000	57.1			2 ¼	380	33.3	35			2.00				
LF 1873 SS K325	11664				82.5			3 ¼						500			2.10	
LF 1873 SS K450	11665				114.3			4 ½									2.23	
LF 1873 SS K600	11666				152.4			6	2.40									
LF 1873 SS K750	11667				190.5			7 ½	2.60									
LF 1873 SS K1000	11668				254.0			10	610					2.80				
LF 1873 SS K1200	11669		304.8		12			3.00										
XPG 1873 SS K225	11708G		XPG Dark Brown		NG Green	21.000		57.1	2 ¼			380	33.3	35			2.00	
XPG 1873 SS K325	11537G							82.5	3 ¼								500	2.10
XPG 1873 SS K450	11538G							114.3	4 ½									2.23
XPG 1873 SS K600	11539G							152.4	6			500						2.40
XPG 1873 SS K750	11540G							190.5	7 ½								2.60	
XPG 1873 SS K1000	11541G							254.0	10								2.80	
XPG 1873 SS K1200	11542G		304.8		12			610	3.00									
NG 1873 SS K225	11709		NG Green		NG Green		21.000	57.1	2 ¼			380			33.3	35	2.00	
NG 1873 SS K325	11694							82.5	3 ¼								500	2.10
NG 1873 SS K450	11695							114.3	4 ½									2.23
NG 1873 SS K600	11696							152.4	6			500						2.40
NG 1873 SS K750	11697							190.5	7 ½								2.60	
NG 1873 SS K1000	11698							254.0	10								2.80	
NG 1873 SS K1200	11699		304.8		12			610	3.00									

Standard length: 160 pitches (10 ft. - 3.048 m) 80 flights

Breaking Load according to Standard ISO 4348 - DIN 8153