

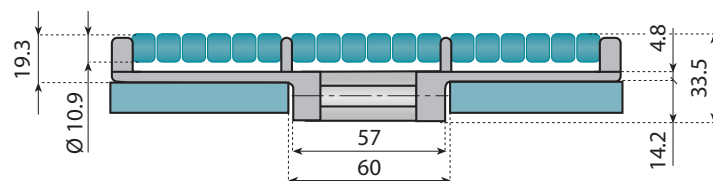
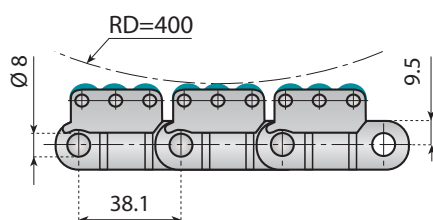


HEAVY DUTY SINGLE HINGE STRAIGHT RUNNING CHAINS WITH LOW NOISE ACCUMULATION ROLLERS


LBP 8257

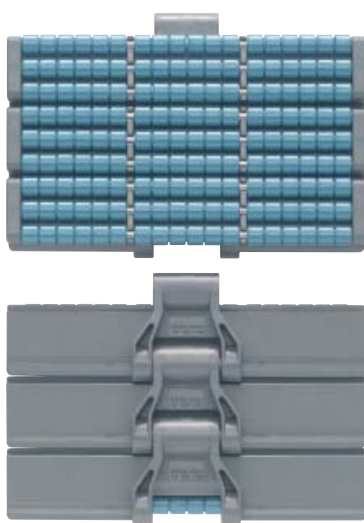


K750

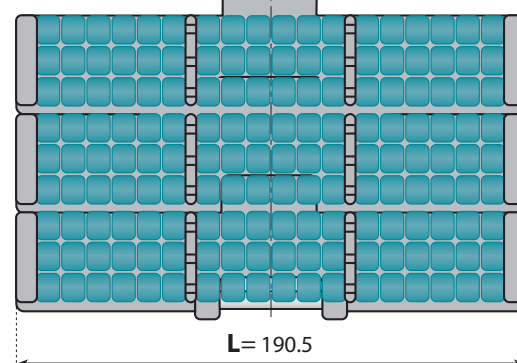

K1000

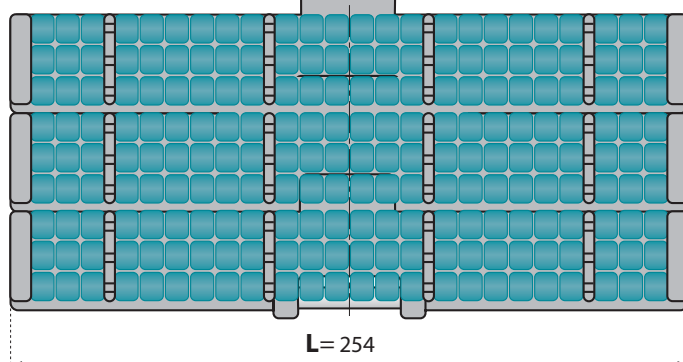

K1200

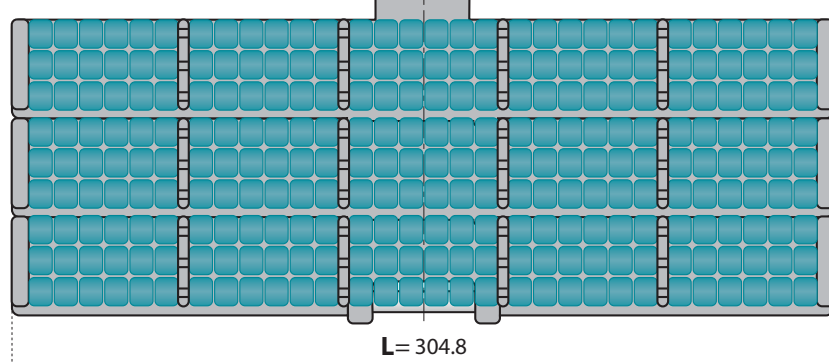

Advantages:

- High breaking load
- Rollers manufactured in Low Friction and low noise material: reduced back-line pressure and low noise level
- Helps standardising your conveyor constructions
- Same hinge width available in many chain types, both steel and plastic, also Flat Top and rubber top chains

Pin material: Austenitic Steel



Pages
4⇒7



Pages
296⇒298



Pages
333⇒337

Chain - Ref.	Code	Material		Breaking load N	Width L		Weight Kg/m
		Plate	Roller		mm	inch	
LBP 8257 K750	11076	LFG Dark Grey	Water blue	10.000	190.5	7 ½	5.65
LBP 8257 K1000	11077				254.0	10	7.20
LBP 8257 K1200	11078				304.8	12	8.10

Standard length: 40 pitches (5 ft. - 1.524 m)

Breaking Load according to Standard ISO 4348 - DIN 8153