

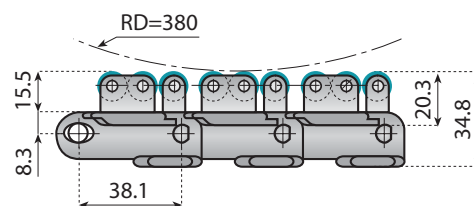



SIDEFLEXING CHAINS WITH LOW NOISE ACCUMULATION ROLLERS

LBP 878 TAB

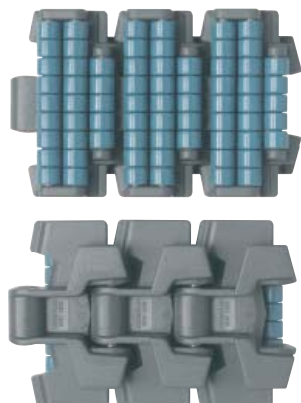

"NOLU-S" CURVES
ARE STRONGLY RECOMMENDED
WITH THESE CHAINS!

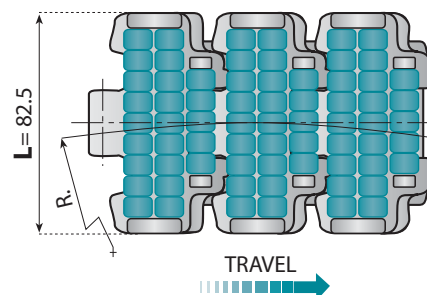

Advantages:

- Rollers manufactured in Low Friction and low noise material: reduced back-line pressure and quiet running.
- Small sideflexing radius 200 mm

Pin material: Austenitic Steel



Pages 4⇒7



Pages 248+253



Pages 257+259



Pages 293⇒295



Pages 324⇒327






Pages 333⇒337


Chain - Ref.	Code	Material		Breaking load N	Width L		R min.	SC	Weight Kg/m
		Plate	Roller		mm	inch			
LBP 878 TAB K325	11388	LFG Dark Grey	Water blue	6.000	82.5	3 ¼	200	45	3.20

SIDEFLEXING CHAINS FOR MAGNETIC SYSTEM WITH LOW NOISE ACCUMULATION ROLLERS

LBP 879 M

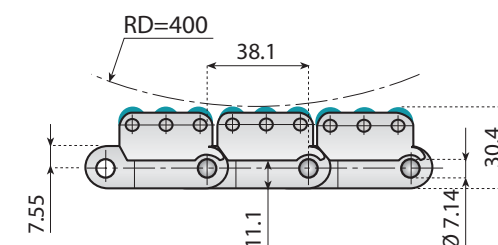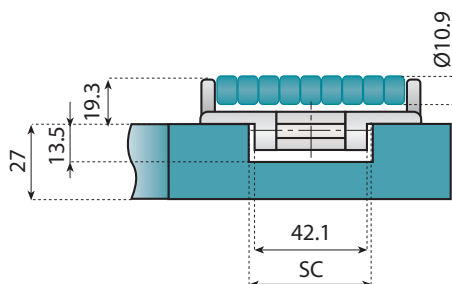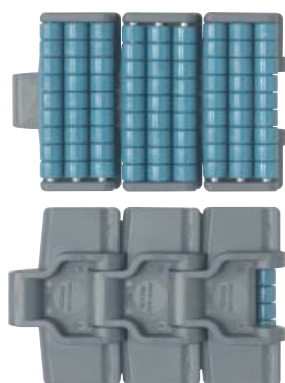

"NOLU-S" CURVES
ARE STRONGLY RECOMMENDED
WITH THESE CHAINS!

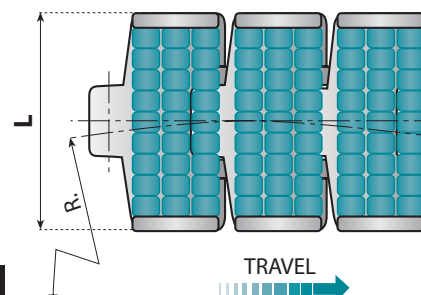

Advantages:

- High ultimate load
- Rollers manufactured in Low Friction and low noise material: reduced back-line pressure and quiet running.
- One conveyor construction
- Easy to clean
- Easy maintenance

Note:

Plastic magnetic system chains do not have tabs or bevels, it is the Stainless Steel pin in the chain which is attracted by the magnets embedded in the curve.

Pin material: Ferritic Stainless Steel



Pages 4⇒7



Page 221



Page 260



Pages 293⇒294

Chain - Ref.	Code	Material		Breaking load N	Width L		R min.	SC	Weight Kg/m
		Plate	Roller		mm	inch			
LBP 879 M K325	11067	LFG Dark Grey	Water blue	5.700	82.5	3 ¼	500	45	2.30

Standard length: 40 pitches (5 ft. - 1.524 m)

Breaking Load according to Standard ISO 4348 - DIN 8153