


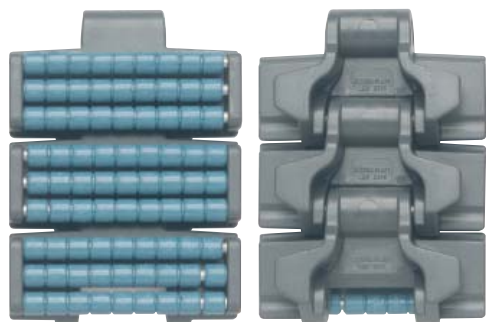
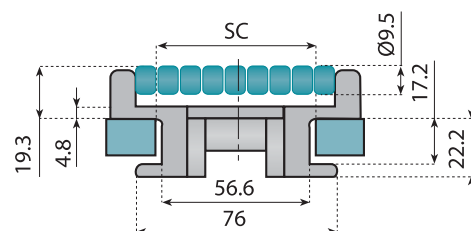


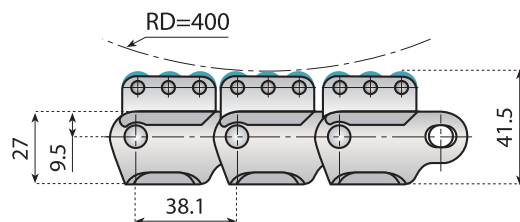

K375

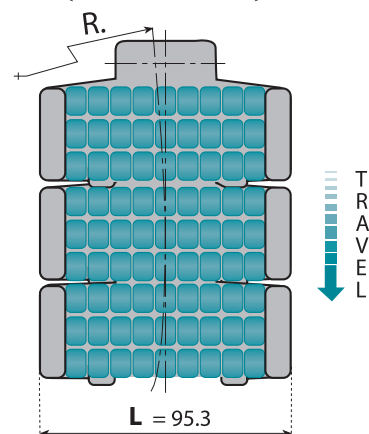

K450

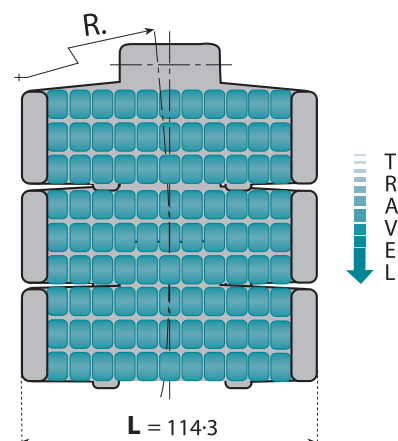

"NOLU-S" CURVES

**ARE STRONGLY RECOMMENDED
WITH THESE CHAINS!**

Advantages:

- High breaking load
- Rollers manufactured in Low Friction and low noise material: reduced back-line pressure and quiet running.

Pin material: Austenitic Steel



Pages 4⇒7



Page 250



Page 258



Pages 296⇒298



Pages 333⇒337

Chain - Ref.	Code	Material		Breaking load N	Width L		R min.	SC	Weight Kg/m
		Plate	Roller		mm	inch			
LBP 882 TAB K375	11070	LFG Dark Grey	Water blue	10.000	95.3	3 ¾	610	60	3.31
LBP 882 TAB K450	11071				114.3	4 ½			4.03

Standard length: 40 pitches (5 ft. - 1.524 m)

Breaking Load according to Standard ISO 4348 - DIN 8153