

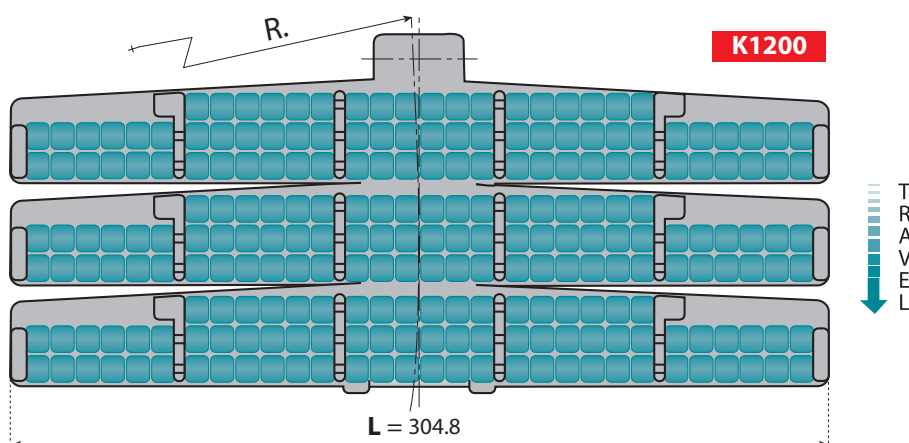
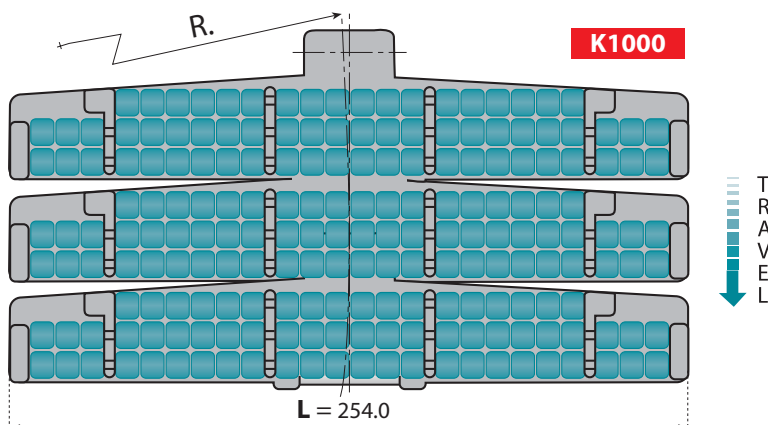
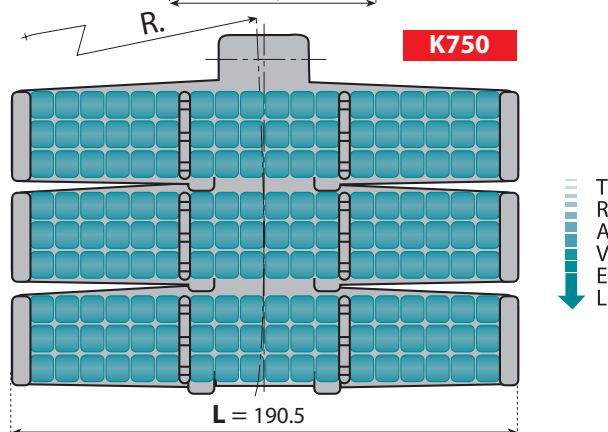
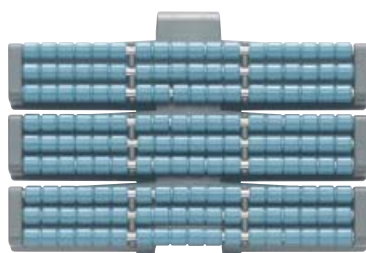


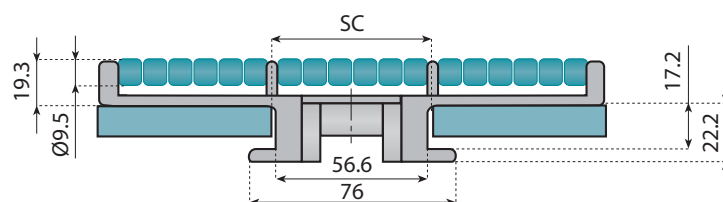

Advantages:

- High breaking load
- Rollers manufactured in Low Friction and low noise material: reduced back-line pressure and quiet running.

Pin material: Austenitic Steel

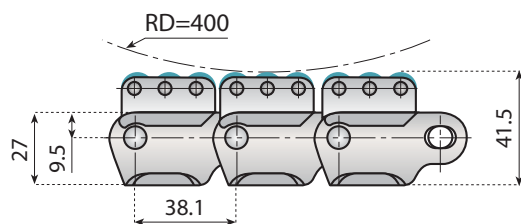

Pages 4→7



Page 250



Page 258



Pages 296→298



Pages 333→337

Chain - Ref.	Code	Material		Breaking load N	Width L		R min.	SC	Weight Kg/m
		Plate	Roller		mm	inch			
LBP 882 TAB K750	11072	LFG Dark Grey	Water blue	10.000	190.5	7 ½	610	60	4.70
LBP 882 TAB K1000	11069				254.0	10			5.90
LBP 882 TAB K1200	11068				304.8	12			6.50

Standard length: 40 pitches (5 ft. - 1.524 m)

Breaking Load according to Standard ISO 4348 - DIN 8153