

Side guide brackets

 Preferred type, readily available (codes marked in red)



AISI 304
Stainless steel



Nickel plated brass



Reinforced
polyamide




BRACKET WITH EYEBOLT

Material: reinforced polyamide, eyebolt and washer in stainless steel AISI 304, nut in nickel plated brass.

Note: max recommended tightening torque 4 Kgm.

Code	For rod Ø (mm)	K	
13632	12	9	n°50
13633	14	9	n°50
13634	12	10.5	n°50
13635	14	10.5	n°50

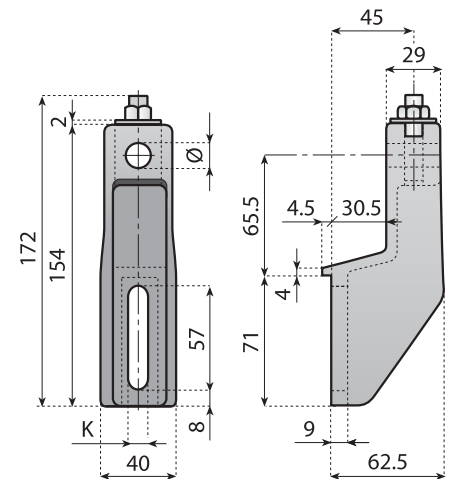


BRACKET WITH EYEBOLT AND KNOB

Material: reinforced polyamide, eyebolt and washer in stainless steel AISI 304, knob in polyamide with nickel plated brass insert.

Note: max recommended tightening torque 4 Kgm.

Code	For rod Ø (mm)	K	
13853	12	9	n°50
13854	14	9	n°50
13855	12	10.5	n°50
13856	14	10.5	n°50
13857	16	10.5	n°50

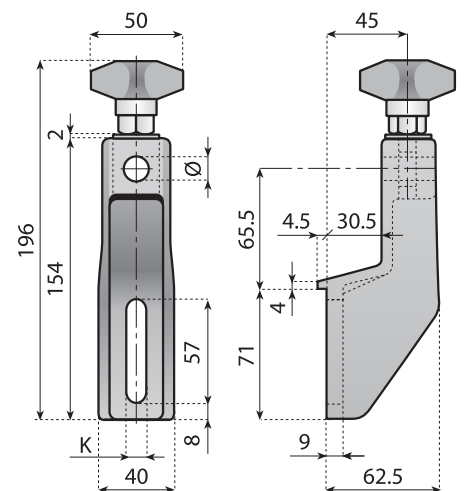


BRACKET WITH EYEBOLT AND KNOB

Material: reinforced polyamide, eyebolt and washer in stainless steel AISI 304, knob in polyamide with nickel plated brass insert.

Note: max recommended tightening torque 4 Kgm.

Code	For rod Ø (mm)	K	
13858	12	9	n°50
13859	14	9	n°50
13860	12	10.5	n°50
13861	14	10.5	n°50
13862	16	10.5	n°50

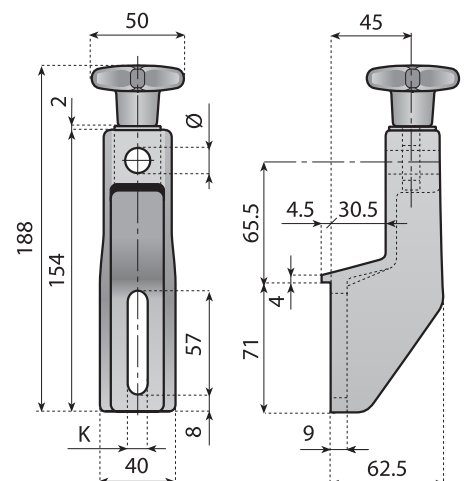

Side guide brackets

Preferred type, readily available (codes marked in red)



AISI 304
Stainless steel



Nickel plated brass



Reinforced
polyamide




BRACKET WITH EYEBOLT AND KNOB

Material: reinforced polyamide, eyebolt and washer in stainless steel AISI 304, knob in polyamide with nickel plated brass insert.

Note: max recommended tightening torque 4 Kgm.

Code	For rod Ø (mm)	K	
13692	12	9	n°50
13693	14		
13696	12		
13697	14	10.5	n°50
13769	16		

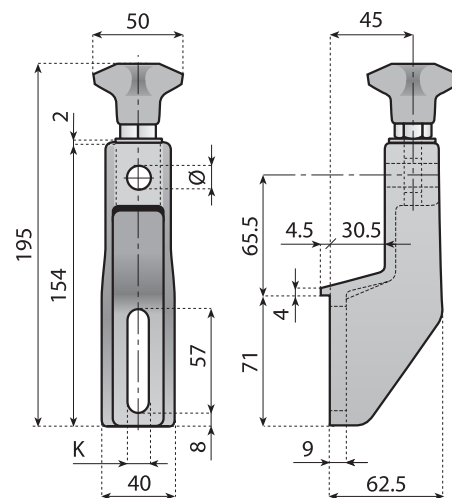


BRACKET WITH EYEBOLT AND KNOB

Material: reinforced polyamide, eyebolt and washer in stainless steel AISI 304, knob in polyamide with nickel plated brass insert.

Note: max recommended tightening torque 4 Kgm.

Code	For rod Ø (mm)	K	
13863	12	9	n°50
13864	14		
13865	12		
13866	14	10.5	n°50
13867	16		

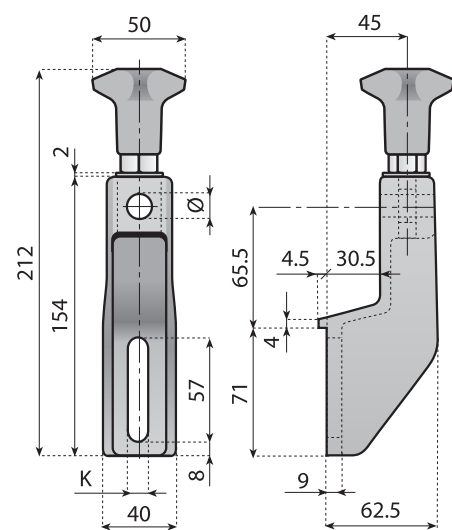

BRACKET WITH EYEBOLT AND KNOB

Material: reinforced polyamide, eyebolt and washer in stainless steel AISI 304, knob in polyamide with nickel plated brass insert.

Note: max recommended tightening torque 4 Kgm.

Code	For rod Ø (mm)	K	
13268	12	9	n°50
13269	14		
13208	12		
13209	14	10.5	n°50
13210	16		

