


## 2250 M FT

## SIDEFLEXING FLAT TOP CHAINBELT FOR MAGNETIC SYSTEM

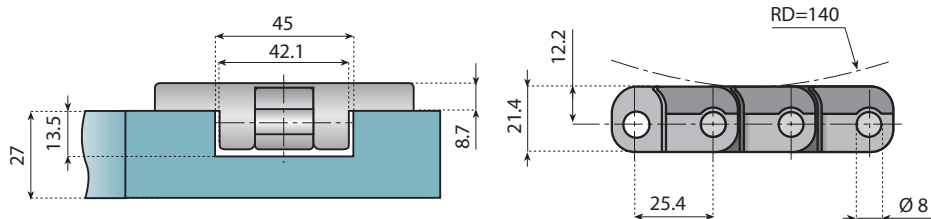


**"NOLU-S" CURVES**  
**ARE STRONGLY RECOMMENDED**  
**WITH THESE CHAINS!**

On request and for adequate quantities  
these chains can be produced in:

Standard materials	
LFG	NGG
Low Friction Acetal Resin	New Generation

XPG	AS
Extra Performance	Anti-static Acetal Resin

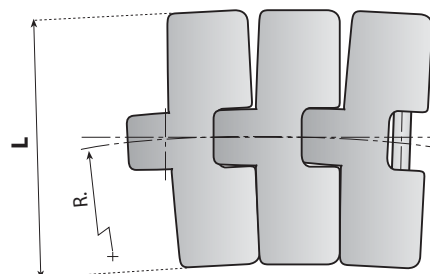

### Applications:

The chainbelt magnetic system with closed top plates is best suited for conveying glass and pet containers (for example PET bottles with petaloid base).



Pages  
4⇒7



Pages  
318⇒319



Pages  
232⇒238




Pages  
333⇒337

Belts - Ref.	Code	Material	Width L		R min.	Max load capacity N	Weight Kg/m²
			mm	inch			
LFG 2250 M K330 FT	<b>11320</b>	<b>LFG</b> Dark Grey	83.8	3 <sup>1</sup> / <sub>4</sub>	500	2.000	1.66
NGG 2250 M K330 FT	<b>11320NGG</b>	<b>NGG</b> Light Grey					
LFG 2250 M K450 FT	<b>11327</b>	<b>LFG</b> Dark Grey	114.3	4 <sup>1</sup> / <sub>2</sub>			
NGG 2250 M K450 FT	<b>11327NGG</b>	<b>NGG</b> Light Grey					1.95

## 2250 M FG

## SIDEFLEXING FLUSH GRID CHAINBELT FOR MAGNETIC SYSTEM

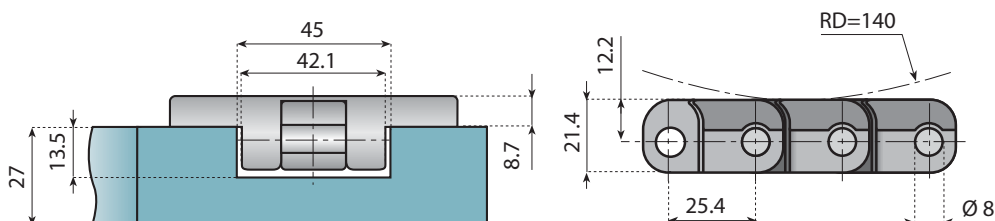


**"NOLU-S" CURVES**  
**ARE STRONGLY RECOMMENDED**  
**WITH THESE CHAINS!**

On request and for adequate quantities  
these chains can be produced in:

Standard materials	
LFG	NGG
Low Friction Acetal Resin	New Generation

XPG	AS
Extra Performance	Anti-static Acetal Resin

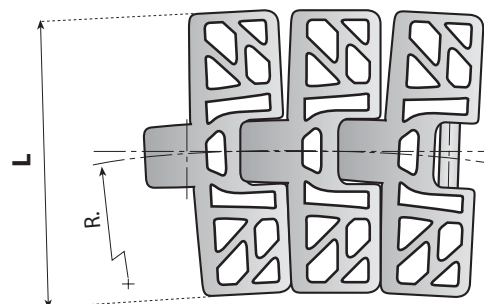

### Applications:

Flush Grid chainbelt for magnetic system with 20% open area is ideal for can conveying applications.



Pages  
4⇒7



Pages  
318⇒319



Pages  
232⇒238



Pages  
333⇒337

Belts - Ref.	Code	Material	Width L		R min.	Max load capacity N	Weight Kg/m <sup>2</sup>
			mm	inch			
LFG 2250 M K330 FG	<b>11321</b>	<b>LFG</b> Dark Grey	83.8	3 <sup>1</sup> / <sub>4</sub>	500	1.900	1.65
NGG 2250 M K330 FG	<b>11321NGG</b>	<b>NGG</b> Light Grey					

Standard length: 120 pitches (10 ft. - 3.048 m)

Pin material: Ferritic Stainless Steel