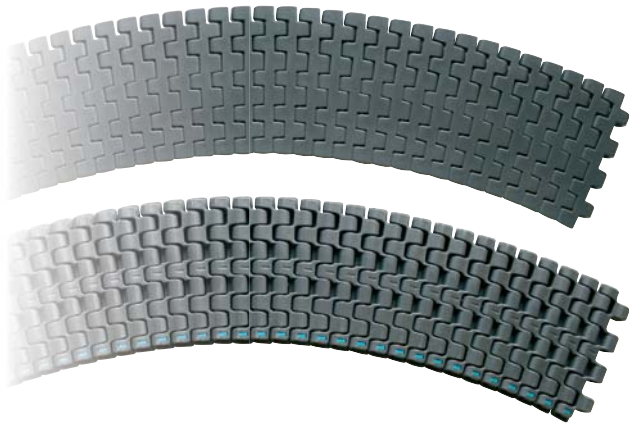


Sideflexing belt for magnetic system

Features:

This system offers a new and unique solution for sideflexing applications in plants with modular conveyors.

Applications:


- To be used in the dry end of the line where bottles or cans run in lanes separated by guides.
- The short pitch makes in-line transfers possible.

Standard length:

240 pitches (10 ft - 3.048 m)

Pin material:

Ferritic Stainless Steel

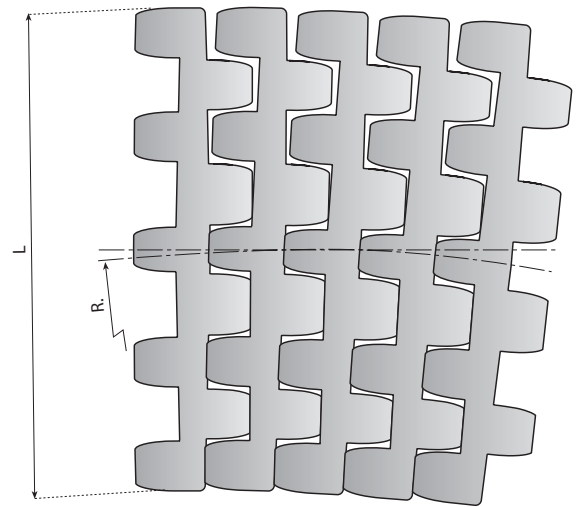

Standard materials

LFG	NGG
Low Friction Acetal Resin	New Generation

On request and for adequate quantities
these chains can be produced in:

XPG	PP	AS
Extra Performance	Polypropylene	Anti-static Acetal Resin



Pages
4⇒7



Pages
225⇒231



Pages
306⇒308
+310



Pages
333⇒337

Belts - Ref.	Code	Material	Width L		R min.	Max load capacity N	Weight Kg/m ²
			mm	inch			
LFG 2120 M K330	11340	LFG Dark Grey	83.8	3.30	500	2500	1.11
XPG 2120 M K330	11340XPG	XPG Dark Brown/Grey				2400	
NGG 2120 M K330	11340NGG	NGG Light Grey				2100	

Standard length: 240 pitches (10 ft. - 3.048 m)