

This belt is bi-directional and can make both left and right turns. Even S-curves are possible if the load allows for that.

The belt is available with several clips and guiding systems:

C-version: just a clip for pin retention;

S-version: attached to the pin retention clip is a slider shoe that can reduce friction and act as a wear part;

T-version: attached to the pin retention clip is a TAB that holds the belt down in the curves;

TP-version: attached to the pin retention clip is a TAB-Positioner combination that holds the belt down in the curves but also guides the belt on straight sections.

For BELTS AVAILABLE IN "NGG" material just add "NGG" to part number (example "code 26625-NGG")

Standard Material

LFB

Low Friction Acetal
(standard material color Blue)

On request and for adequate quantities these chains can be produced in:

LFG

Low Friction
Acetal Resin

NGG


New
Generation

PP


Polypropylene

AS

Anti-static
Acetal Resin

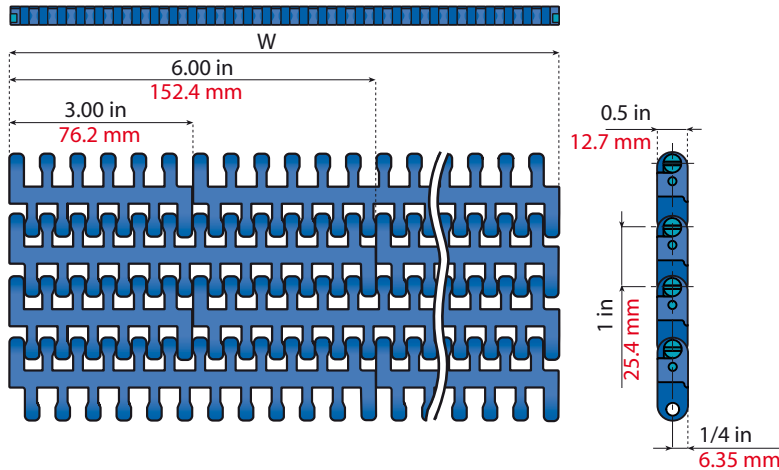


WITHOUT TAB "C" Version



Width W inch	Width W mm	Belts Ref.	Code	Side Flex radius minimum mm	Max load capacity		Back flex radius mm	Weight Kg/m ²
					Straight N/m	Curve N		
3.00	76	LFB-2256-0003-C	26601	145	30.000	2.000	25	7.75
6.00	152	LFB-2256-0006-C	26602	290				
9.00	229	LFB-2256-0009-C	26603	435				
12.00	305	LFB-2256-0012-C	26604	580				
15.00	381	LFB-2256-0015-C	26605	725				
18.00	457	LFB-2256-0018-C	26606	890				
21.00	533	LFB-2256-0021-C	26607	1040				
24.00	610	LFB-2256-0024-C	26608	1250				

Other widths available on request.


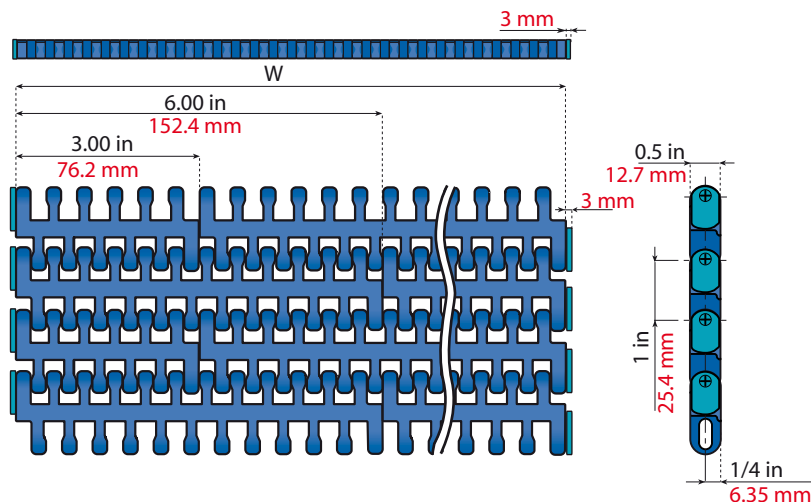


WITH SLIDER SHOE "S" Version



Width W inch	Width W mm	Belts Ref.	Code	Side Flex radius minimum mm	Max load capacity		Back flex radius mm	Weight Kg/m ²
					Straight N/m	Curve N		
3.00	76	LFB-2256-0003-S	26625	145	30.000	2.000	25	7.75
6.00	152	LFB-2256-0006-S	26626	290				
9.00	229	LFB-2256-0009-S	26627	435				
12.00	305	LFB-2256-0012-S	26628	580				
15.00	381	LFB-2256-0015-S	26629	725				
18.00	457	LFB-2256-0018-S	26630	890				
21.00	533	LFB-2256-0021-S	26631	1040				
24.00	610	LFB-2256-0024-S	26632	1250				

Other widths available on request.

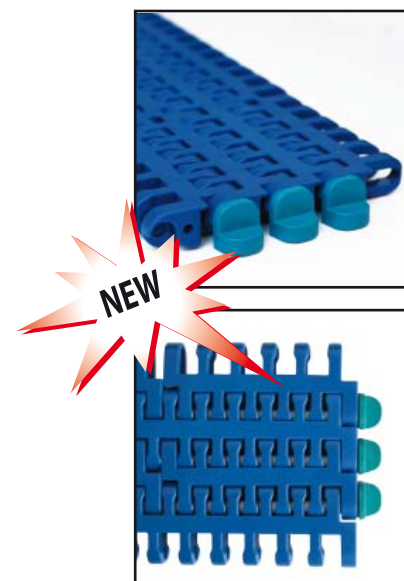
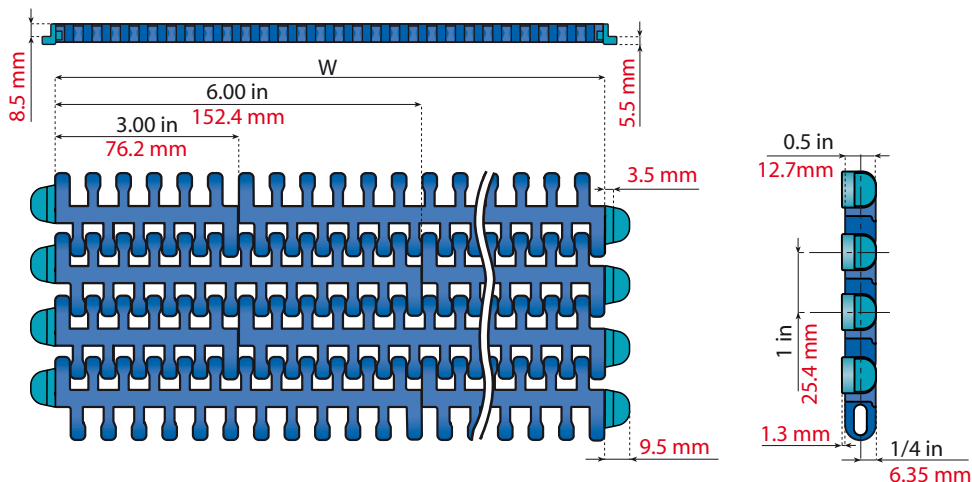


**WITH TAB
"T" Version**




Width W inch	Width W mm	Belts Ref.	Code	Side Flex radius minimum mm	Max load capacity		Back flex radius mm	Weight Kg/m ²
					Straight N/m	Curve N		
3.00	76	LFB-2256-0003-T	26609	145	30.000	2.000	25	7.75
6.00	152	LFB-2256-0006-T	26610	290				
9.00	229	LFB-2256-0009-T	26611	435				
12.00	305	LFB-2256-0012-T	26612	580				
15.00	381	LFB-2256-0015-T	26613	725				
18.00	457	LFB-2256-0018-T	26614	890				
21.00	533	LFB-2256-0021-T	26615	1040				
24.00	610	LFB-2256-0024-T	26616	1250				

Other widths available on request.

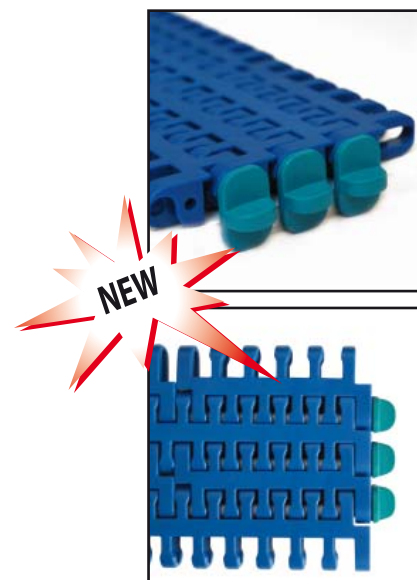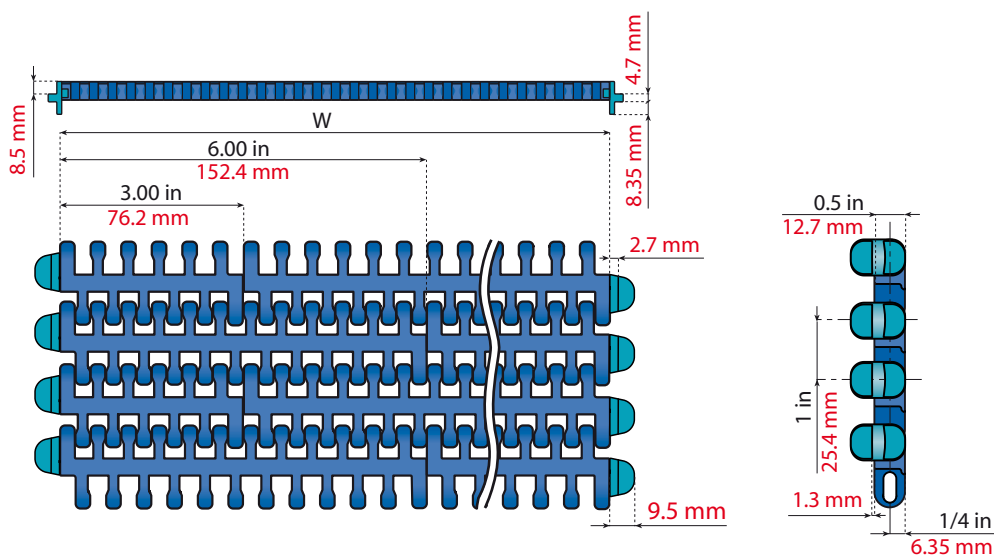

**WITH TAB
AND POSITIONER
"TP" Version**



Width W inch	Width W mm	Belts Ref.	Code	Side Flex radius minimum mm	Max load capacity		Back flex radius mm	Weight Kg/m ²
					Straight N/m	Curve N		
3.00	76	LFB-2256-0003-TP	26617	145	30.000	2.000	25	7.75
6.00	152	LFB-2256-0006-TP	26618	290				
9.00	229	LFB-2256-0009-TP	26619	435				
12.00	305	LFB-2256-0012-TP	26620	580				
15.00	381	LFB-2256-0015-TP	26621	725				
18.00	457	LFB-2256-0018-TP	26622	890				
21.00	533	LFB-2256-0021-TP	26623	1040				
24.00	610	LFB-2256-0024-TP	26624	1250				