



**RADIUS
WIDTH RATIO
MIN. 1.6**






Pages
4⇒7



Pages
321



Pages
333⇒337

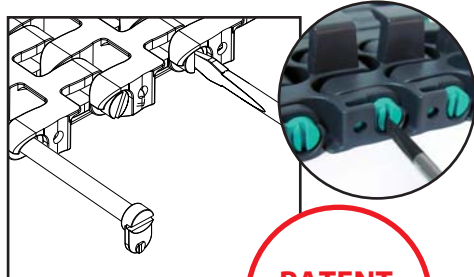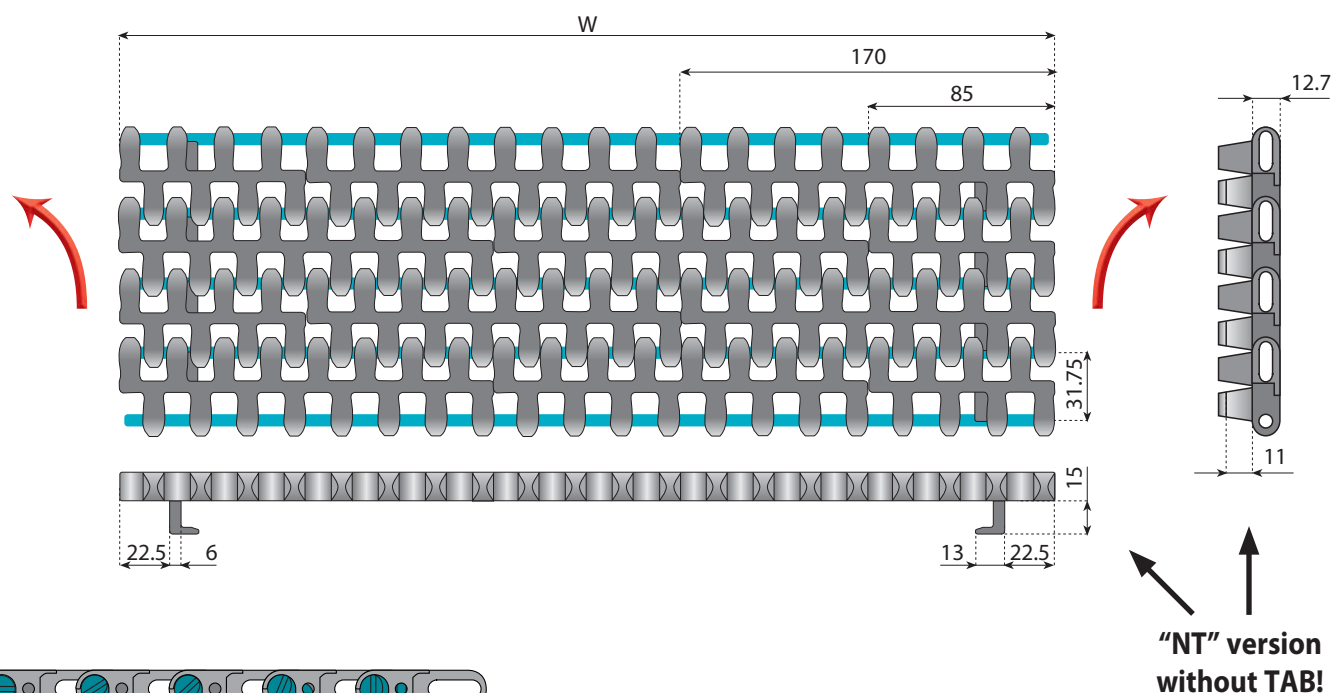

**PATENT
PENDING**

Features:


- Radius – width ratio min. 1.6
- For left or right L- or U-turns
- Can also be used in S-curves
- Strong design
- Optimum product support
- Easy installation and maintenance

**For BELTS AVAILABLE IN “LFW”
material just add “LFW”
to part number
(example “code 27322-LFW”)**


LFG	LFW
Low Friction Acetal Resin (standard material color Dark Grey)	Low Friction Acetal Resin (Color White)

On request and for adequate quantities
these chains can be produced in:

XPG	NGG
Extra Performance (special material color Dark Brown/Grey)	New Generation



WITHOUT TAB



WITH TAB BOTH SIDES

Width W mm	Belts Ref.	Code
255	2351-0255-NT	27322
340	2351-0340-NT	27323
425	2351-0425-NT	27324
510	2351-0510-NT	27325
595	2351-0595-NT	27326
680	2351-0680-NT	27327
765	2351-0765-NT	27328
850	2351-0850-NT	27329

Width W mm	Belts Ref.	Code
255	2351-0255-ST2	27312
340	2351-0340-ST2	27313
425	2351-0425-ST2	27314
510	2351-0510-ST2	27315
595	2351-0595-ST2	27316
680	2351-0680-ST2	27317
765	2351-0765-ST2	27318
850	2351-0850-ST2	27319

Side Flex radius minimum mm	Max load capacity		Back flex radius mm	Weight Kg/m²
	Straight N/m	Curve N		
408	30.000	2.500	25	8.8
545				
680				
840				
980				
1150				
1300				
1450				

Standard length: 96 pitches (10 ft. - 3.048 m)