



**RADIUS
WIDTH RATIO
MIN. 1.0**




Pages
4⇒7





Pages
321



Pages
333⇒337

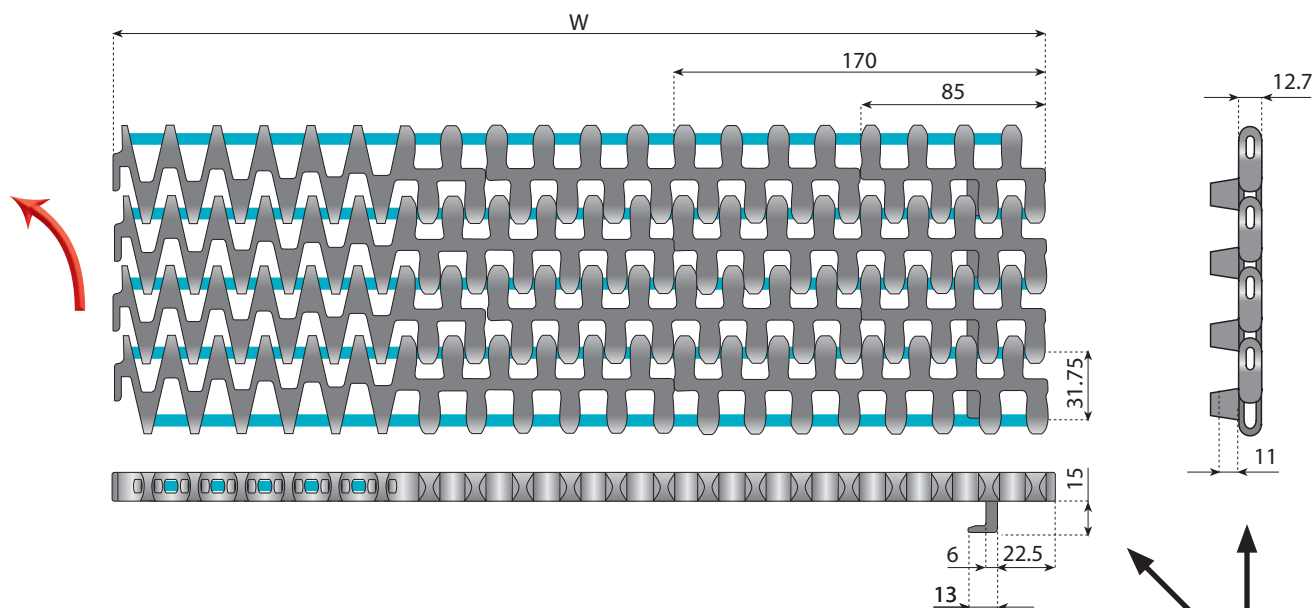

**"SR" version
without TAB!**

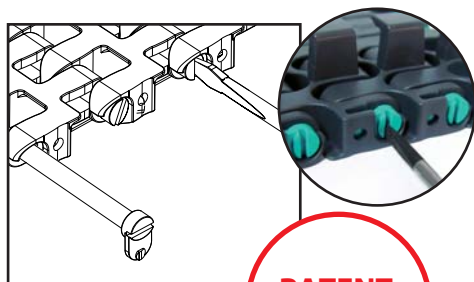

**PATENT
PENDING**

Features:

- Radius – width ratio min. 1.0 for tight curves
- For left or right L- or U-turns
- Strong design
- Optimum product support
- Easy installation and maintenance

**For BELTS AVAILABLE IN "LFW"
material just add "LFW"
to part number
(example "code 27563-LFW")**

LFG	LFW
Low Friction Acetal Resin (standard material color Dark Grey)	Low Friction Acetal Resin (Color White)

On request and for adequate quantities
these chains can be produced in:

XPG	NGG
Extra Performance (special material color Dark Brown/Grey)	New Generation

WITHOUT TAB

WITH TAB ONE SIDES

Width W mm	Belts Ref.	Code
-	-	-
340	2551-0340-SR	27563
425	2551-0425-SR	27564
510	2551-0510-SR	27565
595	2551-0595-SR	27566
680	2551-0680-SR	27567
765	2551-0765-SR	27568
850	2551-0850-SR	27569

Width W mm	Belts Ref.	Code
-	-	-
340	2551-0340-SRT	27543
425	2551-0425-SRT	27544
510	2551-0510-SRT	27545
595	2551-0595-SRT	27546
680	2551-0680-SRT	27547
765	2551-0765-SRT	27548
850	2551-0850-SRT	27549

Side Flex radius minimum mm	Max load capacity		Back flex radius mm	Weight Kg/m ²
	Straight N/m	Curve N		
-	30.000	2.500	25	7.8
340				
425				
510				
595				
680				
850				
1050				

Standard length: 96 pitches (10 ft. - 3.048 m)