


2351 - 2551

CURVE GUIDE PROFILES

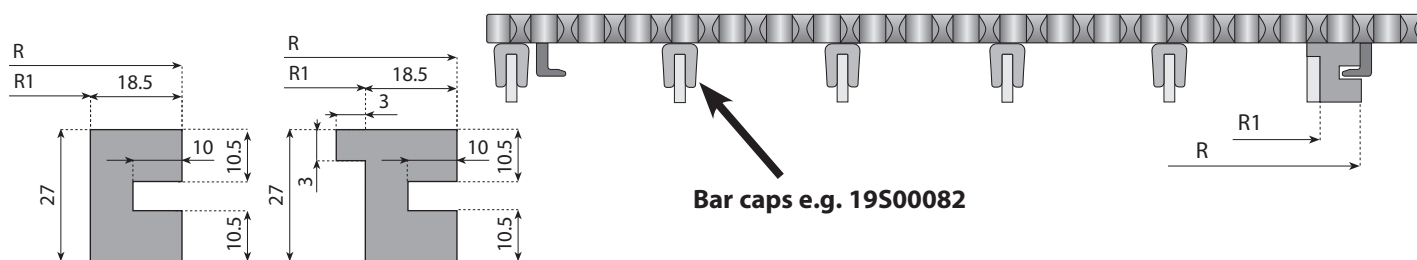


Bar caps e.g. 19S00082

Code		Belt Width mm	Min radius for 2351		Min radius for 2551	
			R	R1	R	R1
 190276	 190276N	255	634.5	616	-	-
		340	856.5	838	651.5	633
		425	1076.5	1058	821.5	803
		510	1321.5	1303	991.5	973
		595	1546.5	1528	1161.5	1143
		680	1801.5	1783	1331.5	1313
		765	2036.5	2018	1586.5	1568
		850	2271.5	2253	1871.5	1853

Material: Nolu-SR
Standard length: 3 meter

2451 - 2651

CURVE GUIDE PROFILES

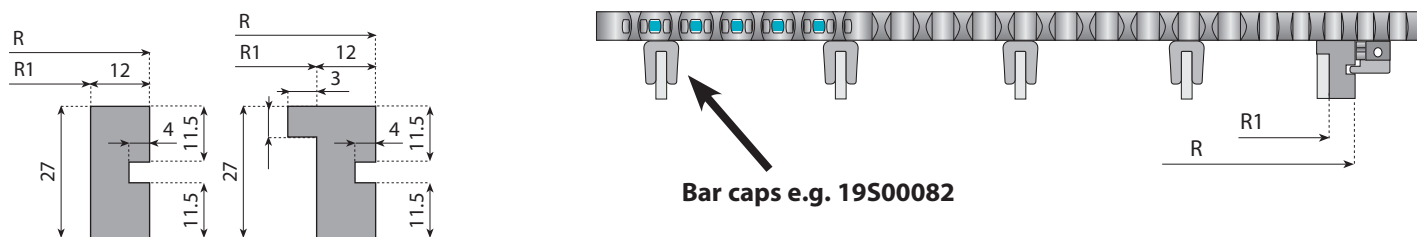


Bar caps e.g. 19S00082

Code		Belt Width mm	Min radius for 2451		Min radius for 2651	
			R	R1	R	R1
 190277	 190277N	340	850	838	-	-
		425	1070	1058	815	803
		510	1315	1303	985	973
		595	1540	1528	1155	1143
		680	1795	1783	1325	1313
		765	2030	2018	1580	1568
		850	2265	2253	1865	1853

Material: Nolu-SR
Standard length: 3 meter

2351 - 2551 without tab

CURVE GUIDE PROFILES

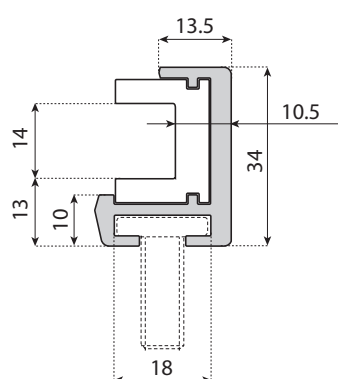

MBG - SUPPORT FOR CHAIN AND BELTS



Aluminum and Nolu-S guide rail for use in guiding the sides of selected plastic modular conveyor belts through turns. Minimum radius 457 mm (inside edge).

Replaceable Nolu-S strips, light grey.

Standard length: 3 meter

STAINLESS STEEL T-HEAD SCREW M8

Supply unit: 10 pieces



Code	Ref.
19S00035-3M	VG-MBG-50-NS-3M
Insert Replacement 19S00077-3M	VG-PMBG-50-NS-3M

Code	Ref.	Standard length L mm
13S00255	VG-1568M-01	16
13S00256	VG-1568M-02	19
13S00258	VG-1568M-04	32

On request we can also supply complete compact curves according to your specifications. See example drawing.

