


Serie **UCF-RL**

Maintenance Free Flanged bearing support for plain shafts d 30-40 mm

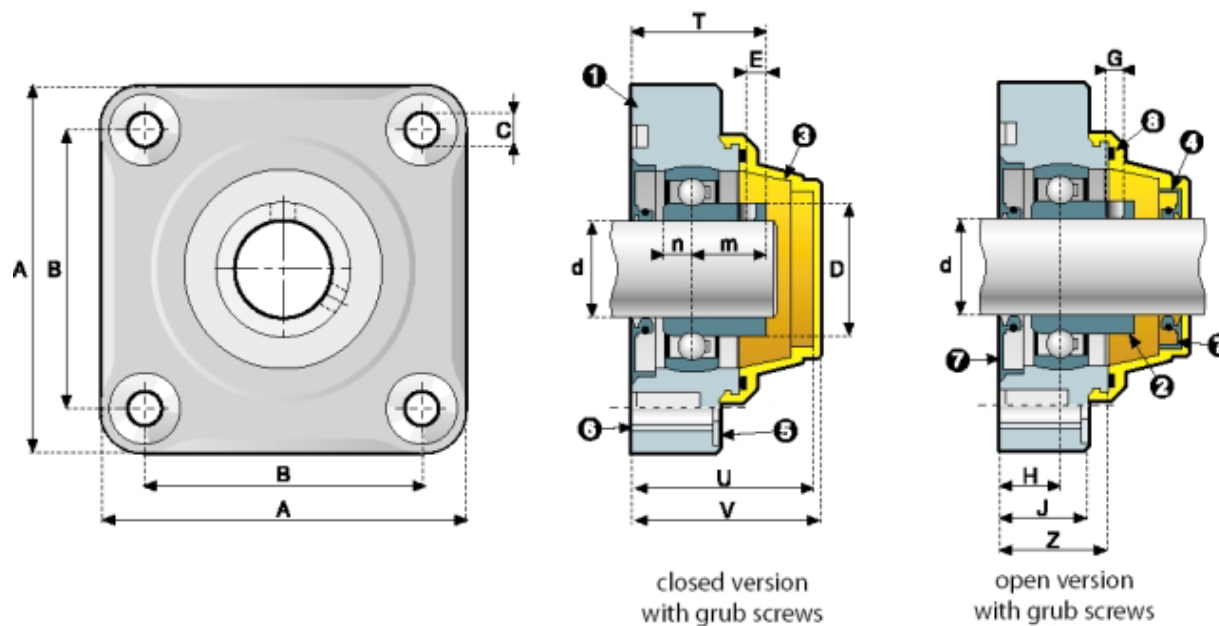

COMPONENTS

- 1 Housing in plastic material.
- 2 High quality maintenance free ball bearing.
- 3 Clip-on safety cap (closed version).
- 4 Clip-on safety cap (open version).
- 5 Washer UNI 6592.
- 6 Spacers to reinforce bolt holes.
- 7 Rotary shaft seal ring with extra dust-protection lip.
- 8 Heavy duty O-Ring.

Ø d mm	CODE VERSION		DIMENSIONS (mm)														BEARING LOAD RATINGS		MAX RADIAL LOAD CAPACITY ON PLASTIC HOUSING (N)	WEIGHT (Kg)
	CLOSED	OPEN	A	B	C	D	E	G	H	J	Z	T	m	n	U	V	DYNAMIC C (N)	STATIC Co (N)		

SHAFT LOCKING WITH GRUB SCREWS VERSION IN POLYAMIDE - PA -																				
30	50206SRL	55206SRL	110	77	11	40	5.9	M6x0.75	22	25	36	44	22	8	68	70	15000	11300	12000	0.63
30	50206RL	55206RL	110	83	11	40	5.9	M6x0.75	18	25	31	40	22	8	53	55	15000	11300	13000	0.59
40	50208SRL	55208SRL	110	77	11	52.7	8	M8x1.00	19	25	36	50.1	32.1	9	68	70	22400	17900	10000	0.94
40	50208RL	55208RL	110	83	11	52.7	8	M8x1.00	20	25	35	52.1	32.1	9	67	69	22400	17900	12500	0.90
40	50208NL	55208NL	118	92	14	52.7	8	M8x1.00	20	25	35	52.1	32.1	9	67	69	22400	17900	12800	1.00
40	50208FRL	55208FRL	130	101.5	14	52.7	8	M8x1.00	20	25	35	52.1	32.1	9	67	69	22400	17900	12500	0.98

SHAFT LOCKING WITH GRUB SCREWS VERSION IN POLYPROPYLENE - PP -																				
30	60206SRL	65206SRL	110	77	11	40	5.9	M6x0.75	22	25	36	44	22	8	68	70	15000	11300	6100	0.63
30	60206RL	65206RL	110	83	11	40	5.9	M6x0.75	18	25	31	40	22	8	53	55	15000	11300	6200	0.59
40	60208SRL	65208SRL	110	77	11	52.7	8	M8x1.00	19	25	36	50.1	32.1	9	68	70	22400	17900	5800	0.94
40	60208RL	65208RL	100	83	11	52.7	8	M8x1.00	20	25	35	52.1	32.1	9	67	69	22400	17900	6150	0.90
40	60208NL	65208NL	118	92	14	52.7	8	M8x1.00	20	25	35	52.1	32.1	9	67	69	22400	17900	6180	1.00
40	60208FRL	65208FRL	130	101.5	14	52.7	8	M8x1.00	20	25	35	52.1	32.1	9	67	69	22400	17900	6150	0.98

The dimension of the housings related to codes printed in bold letters are unified according to international standards.

COLOUR

- Bearing support in black.
- Safety cap in yellow.
- For sufficient quantities parts can be produced in different colours.