






Other Series: 878 TAB GS

1873 GS SIDEFLEXING PLASTIC PLATE TOP GRIPPER CHAINS with base roller chains 19.05 mm ($\frac{3}{4}$ ") pitch

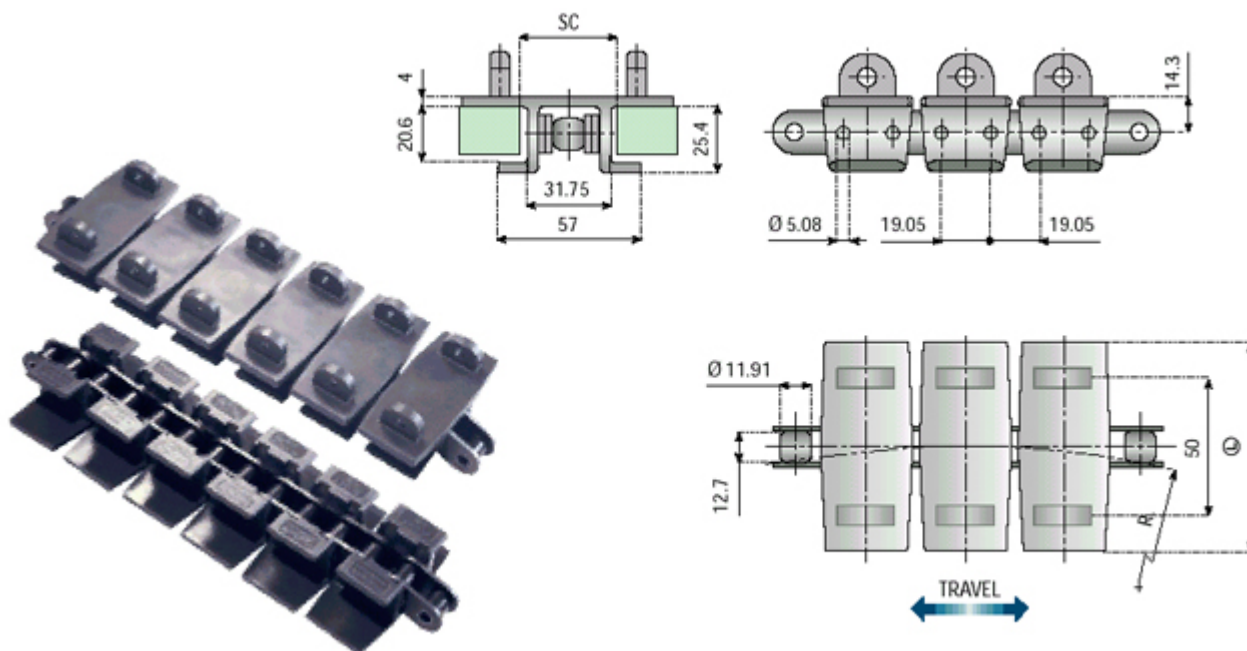

CHAIN - REF.	CODE	Material		Breaking Load N	Width L		R min.	SC		Weight Kg/m
		Roller Chain	Plate		mm	inch.		Straight	Curving	
LFG 1873 GS K325	11790	C 45	LFG (Grey)	27000	82.5	3.1/4	380	33.3	35	2.36
LFG 1873 SS K325 GS	11791	AUSTIC		21000						
LFG 1873 GS K450	11795	C 45		27000	114.3	4.1/2				2.88
LFG 1873 SS K450 GS	11796	AUSTIC		21000						



1873 GS1 SIDEFLEXING PLASTIC PLATE TOP CHAINS with gripper snap on

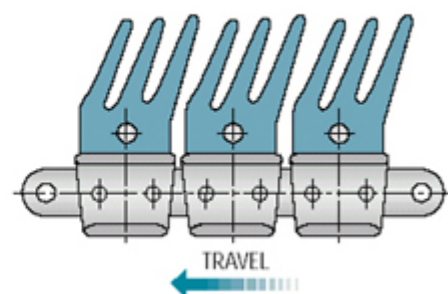**GS 1****LIGHT APPLICATIONS**

CHAIN - REF.	CODE	Kit Rubber Pin	Only Rubber	K mm	Material			Weight Kg/m
					Roller Chain	Plate	Gripper	
LFG 1873 GS1 K325	11762	11730	11740	82	C 45	LFG (Grey)	THERMOPLASTIC	4.65
LFG 1873 SS K325 GS1	11763				AUSTIC			
LFG 1873 GS1 K450	11766	11731	11741	114	C 45			7.05
LFG 1873 SS K450 GS1	11767				AUSTIC			

1873 GS2 SIDEFLEXING PLASTIC PLATE TOP CHAINS

with gripper snap on

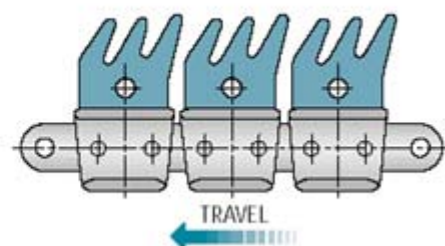

**GS 2****HEAVY APPLICATIONS**

CHAIN - REF.	CODE	Kit Rubber Pin	Only Rubber	K mm	Material			Weight Kg/m
					Roller Chain	Plate	Gripper	
LFG 1873 GS2 K325	11775	11732	11742	82	C 45	LFG (Grey)	THERMOPLASTIC	4.05
LFG 1873 SS K325 GS2	11776				AUSTIC			
LFG 1873 GS2 K450	11779	11733	11743	114	C 45			6.45

LFG 1873 SS K450 GS2	11780				AUSTIC		
-------------------------	-------	--	--	--	---------------	--	--

1873 GS3 SIDEFLEXING PLASTIC PLATE TOP CHAINS

with gripper snap on

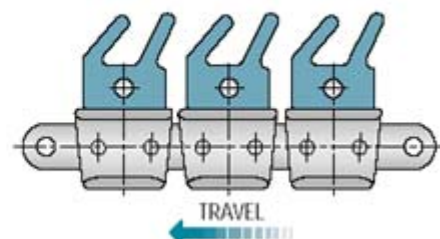


GS 3

SPECIAL APPLICATIONS

CHAIN - REF.	CODE	Kit Rubber Pin	Only Rubber	K mm	Material			Weight Kg/m
					Roller Chain	Plate	Gripper	
LFG 1873 GS3 K325	11781	11734	11744	82	C 45	LFG (Grey)	THERMOPLASTIC	3.95
LFG 1873 SS K325 GS3	11782				AUSTIC			
LFG 1873 GS3 K450	11783	11735	11745	114	C 45			6.35
LFG 1873 SS K450 GS3	11784				AUSTIC			

1873 GS4 SIDEFLEXING PLASTIC PLATE TOP CHAINS

with gripper snap on



GS 4

SPECIAL APPLICATIONS

CHAIN - REF.	CODE	Kit Rubber Pin	Only Rubber	K mm	Material			Weight Kg/m
					Roller Chain	Plate	Gripper	
LFG 1873 GS4 K325	11785	11728	11746	82	C 45			4.15
LFG 1873 SS K325 GS4	11786				AUSTIC			

LFG 1873 GS4 K450	11787	11729	11747	114	C 45	LFG (Grey)	THERMOPLASTIC	6.55
LFG 1873 SS K450 GS4	11788				AUSTIC			

C 45 - Through Hardened Carbon Steel ([For further information](#))

AUSTIC - Austenitic Stainless Steel ([For further information](#))

LFG - Low Friction Acetal Resin ([For further information](#))

Standard length:

160 pitches (10 Ft. - 3.048 m).

Advantages:

- High wear resistance
- High speeds
- Exceptional durability
- Optimum performance
- Extremely low noise level
- Removable gripper
- Rubber pads with high resistance
- Plastic snap-on links
- Not suitable with oils
- Resistant to weak acid



**Chains
Material**



Sprockets



**Corner
Tracks**



**Straight
Tracks**



**Chemical
Resistance**



**Engineering
Information**



Print



Attention