


**"NOLU-S" CURVES**  
**ARE STRONGLY RECOMMENDED**  
**WITH THESE CHAINS!**

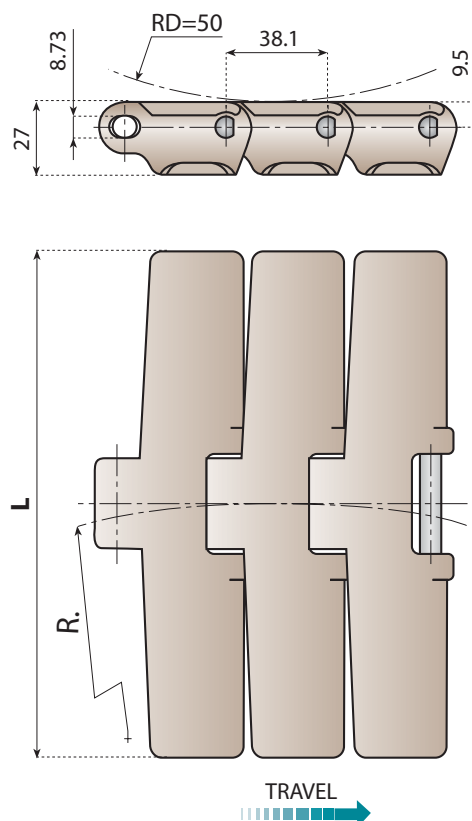

### Characteristics:

The 882 TAB type has a larger pin size hinge geometry and because of a well balanced distribution of the material it has an excellent carrying load capacity.

The standard widths are produced up to 304.8 mm (12") making it compatible with the 821 series and offering the largest conveying area in the flat top chain products.

### Advantages:

- Heavy duty

**Pin material:** Austenitic Steel.



Pages  
4→7



Page  
250



Page  
258



Pages  
296→298



Pages  
333→337

| Chain - Ref.      | Code          | Material plate    | Breaking load<br>N | Width L |      | R<br>min. | SC | Weight<br>Kg/m |
|-------------------|---------------|-------------------|--------------------|---------|------|-----------|----|----------------|
|                   |               |                   |                    | mm      | inch |           |    |                |
| LF 882 TAB K450   | <b>11040</b>  | LF<br>Brown       | 10.000             | 114.3   | 4 ½  | 610       | 58 | 2.03           |
| LF 882 TAB K750   | <b>11041</b>  |                   |                    | 190.5   | 7 ½  |           |    | 2.46           |
| LF 882 TAB K1000  | <b>11042</b>  |                   |                    | 254.0   | 10   |           |    | 2.87           |
| LF 882 TAB K1200  | <b>11043</b>  |                   |                    | 304.8   | 12   |           |    | 3.41           |
| XPG 882 TAB K450  | <b>11513G</b> | XPG<br>Dark Brown | 9.500              | 114.3   | 4 ½  |           |    | 2.03           |
| XPG 882 TAB K750  | <b>11514G</b> |                   |                    | 190.5   | 7 ½  |           |    | 2.46           |
| XPG 882 TAB K1000 | <b>11515G</b> |                   |                    | 254.0   | 10   |           |    | 2.87           |
| XPG 882 TAB K1200 | <b>11516G</b> |                   |                    | 304.8   | 12   |           |    | 3.41           |
| NG 882 TAB K450   | <b>11483</b>  | NG<br>Green       | 9.000              | 114.3   | 4 ½  |           |    | 2.03           |
| NG 882 TAB K750   | <b>11484</b>  |                   |                    | 190.5   | 7 ½  |           |    | 2.46           |
| NG 882 TAB K1000  | <b>11485</b>  |                   |                    | 254.0   | 10   |           |    | 2.87           |
| NG 882 TAB K1200  | <b>11486</b>  |                   |                    | 304.8   | 12   |           |    | 3.41           |

**Standard length:** 80 pitches (10 ft. - 3.048 m)

Breaking Load according to Standard ISO 4348 - DIN 8153